

5-Megapixel C-Mount Code Reader V440-F

User-configurable barcode reader.

The **V440-F C-Mount Code Reader** with **WebLink 3.0** user interface is a highly configurable reader with a 35 frame-per-second 5 megapixel monochrome global shutter sensor. The V440-F can be deployed in virtually any application.

The C-mount lens, external lighting options, and 5 megapixel sensor optimize the V440-F for decoding:

- Very small codes (0.5 mil (0.013 mm) or smaller, depending on lens);
- Multiple codes in a single field of view (up to 400);
- Codes in large fields of view, at long distances, or at very high speeds.

The V440-F is pin-compatible with MicroHAWK V430-F readers, ensuring a clear upgrade path with all the same wiring accessories.


WebLink 3.0 – the intuitive, browser-based setup tool for the V440-F – allows you to configure highly complex applications quickly and easily.



Features

- Enhanced WebLink 3.0 functionality, including Matrix Mode and Configuration Database.
- 5 MP monochrome global shutter sensor.
- 35 FPS image acquisition.
- Higher FPS using pixel binning and region of interest (ROI) modes.
- C-mount lens-compatible.
- External lighting-compatible (dedicated strobe output).
- Smallest reader in its class (based on OMRON investigation in Sept. 2021).
- IP40-rated.
- Support for Digital I/O, RS-232, Ethernet TCP/IP, EtherNet/IP™, and PROFINET communications.
- PoE (Power over Ethernet) or direct 24V.


System Configuration

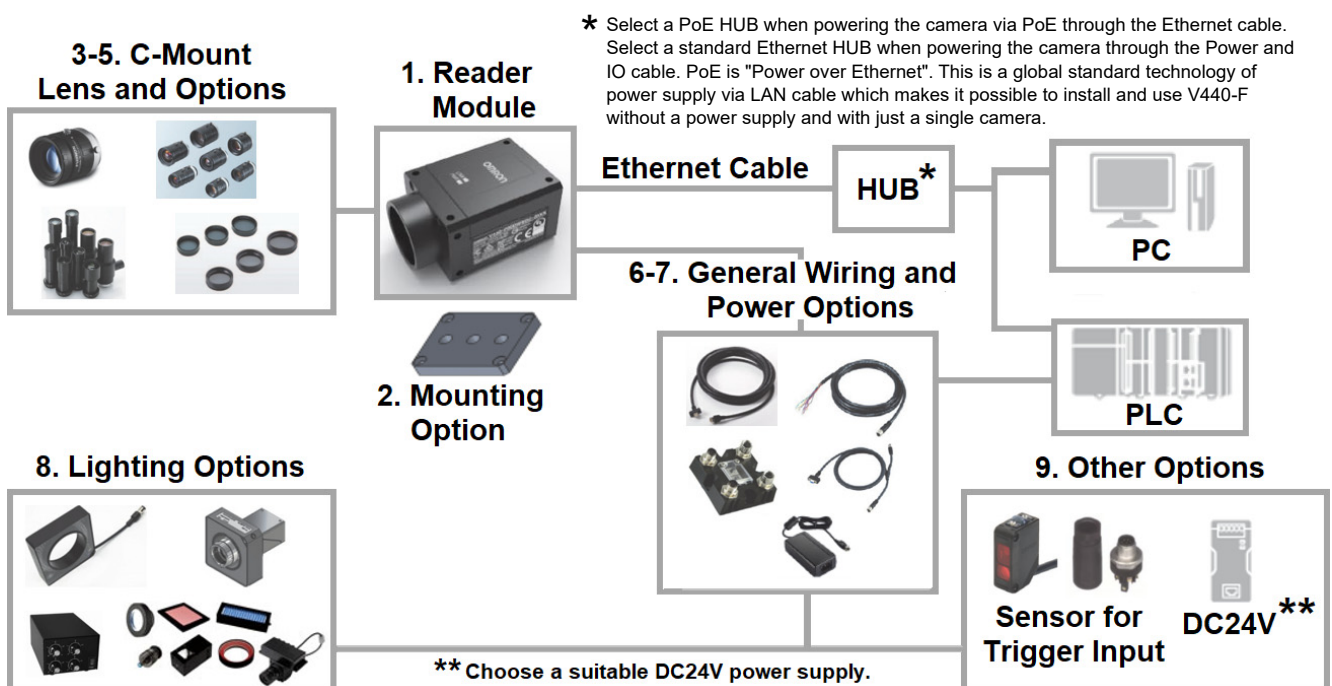

V440-F

Ordering Information

1. Reader Models


| Appearance | Description | Part Number |
|---|--|------------------|
|  | V440-F, No Optics, 5 MP, Mono, No Light, Plus Mode | V440-FXXX50M-NNP |
| | V440-F, No Optics, 5 MP, Mono, No Light, X-Mode | V440-FXXX50M-NNX |

Note 1: V440-F readers are sold without lenses, lights, cables, or mounting. All of these items can be found in later sections of this datasheet.

Note 2: The V440-F uses all the same cables and interconnect accessories as the MicroHAWK V430-F, with the exception of the M12 Ethernet cables. The V440-F uses standard Ethernet cables. High-Flex TPE cables and Robot Ethernet cables are shown later in this datasheet.

Note 3: Plus Mode is suitable for high-contrast codes such as labels. X-Mode is suitable for all labels as well as low print grade codes and DPM.

2. Mounting Options

| Appearance | Type | Part Number |
|---|--|-------------|
|  | 1/4-20 Reader Mounting Block Kit (V440-F series only) | V440-AM0 |

3. C-Mount Lens Options

The V440-F has a C-mount, and can be used with standard C-mount, telecentric, and macro lenses. Omron offers a variety of lenses at a variety of prices and resolutions for standard reading and code grading applications.

Three different C-mount lens sets are listed below for general reading and code grading. The tables include cross references to compatible polarizing filters and Smart Series Ring Lights.

When using the V440-F with Smart Series Ring Lights and a polarizer, the appropriate polarizing filter must be used on the lens.

Compact C-Mount Reading Lenses*

- Low Cost
- Small Size
- Reading Lens – 85 lp/mm
- Locking Screws for Focus and Iris
- F-Number of 1.2 to 16



| Part Number | Focal Length | Minimum Working Distance (mm) | Size (mm) – Length x Diameter | Filter Size | Polarizer Part Number | Smart Ring Light Compatibility |
|---------------|--------------|-------------------------------|-------------------------------|-------------|-----------------------|--------------------------------|
| 98-9000167-01 | 6 mm | 100 | 36.7 x 29.5 | M27 P0.5 | 3Z4S-LE SV-PL270-SS | R-70/R-100 |
| 98-9000168-01 | 9 mm | 100 | 35 x 29.5 | M27 P0.5 | 3Z4S-LE SV-PL270-SS | R-70/R-100 |
| 98-9000169-01 | 12.5 mm | 100 | 29.5 x 29.5 | M25.5 P0.5 | 3Z4S-LE SV-PL255-SS | R-70/R-100 |
| 98-9000170-01 | 16 mm | 100 | 29.5 x 29.5 | M25.5 P0.5 | 3Z4S-LE SV-PL255-SS | R-70/R-100 |
| 98-9000171-01 | 25 mm | 150 | 29.5 x 29.5 | M25.5 P0.5 | 3Z4S-LE SV-PL255-SS | R-70/R-100 |
| 98-9000172-01 | 35 mm | 250 | 29.5 x 29.5 | M25.5 P0.5 | 3Z4S-LE SV-PL255-SS | R-70/R-100 |

*For working distances shorter than the minimum working distance specified for the lens, an extension ring is required to focus the lens.

Standard C-Mount Reading Lenses*

- Medium Size
- Reading Lens – 100 lp/mm
- Locking Screws for Focus and Iris
- F-Number of 1.4 to 16



| Part Number | Focal Length | Minimum Working Distance (mm) | Size (mm) – Length x Diameter | Filter Size | Polarizer Part Number | Smart Ring Light Compatibility |
|-------------------|--------------|-------------------------------|-------------------------------|-------------|-----------------------|--------------------------------|
| 3Z4S-LE SV-0614H | 6 mm | 100 | 57.5 x 42 | M40.5 P0.5 | 3Z4S-LE SV-PL405-SS | R-100 |
| 3Z4S-LE SV-0814H | 8 mm | 100 | 52.5 x 39 | M35.5 P0.5 | 3Z4S-LE SV-PL355-SS | R-100 |
| 3Z4S-LE SV-1214H | 12 mm | 100 | 51 x 30 | M27 P0.5 | 3Z4S-LE SV-PL270-SS | R-70/R-100 |
| 3Z4S-LE SV-1614H | 16 mm | 100 | 47.5 x 30 | M27 P0.5 | 3Z4S-LE SV-PL270-SS | R-70/R-100 |
| 3Z4S-LE SV-2514H | 25 mm | 150 | 36 x 30 | M27 P0.5 | 3Z4S-LE SV-PL270-SS | R-70/R-100 |
| 3Z4S-LE SV-3514H | 35 mm | 200 | 45.5 x 44 | M35.5 P0.5 | 3Z4S-LE SV-PL355-SS | R-100 |
| 3Z4S-LE SV-5014H | 50 mm | 300 | 57.5 x 44 | M40.5 P0.5 | 3Z4S-LE SV-PL405-SS | R-100 |
| 3Z4S-LE SV-7525H | 75 mm | 1200 | 54.6 x 36 | M34.0 P0.5 | 3Z4S-LE SV-PL340-SS | R-100 |
| 3Z4S-LE SV-10028H | 100 mm | 2000 | 71.6 x 39 | M37.5 P0.5 | 3Z4S-LE SV-PL375-SS | R-100 |

*These are the standard lenses offered in the Omron Vision Accessories Catalog.

*For working distances shorter than the minimum working distance specified for the lens, an extension ring is required to focus the lens.

High-Resolution Code Reading / Grading C-Mount Lenses*

- Medium Size
- Reading / 1D and 2D Code Grading Lens – 145 lp/mm
- Locking Screws for Focus and Iris
- F-Number of 1.4 to 16



| Part Number | Focal Length | Minimum Working Distance (mm) | Size (mm) – Length x Diameter | Filter Size | Polarizer Part Number | Smart Ring Light Compatibility |
|---------------|--------------|-------------------------------|-------------------------------|-------------|-----------------------|--------------------------------|
| 98-9000192-01 | 6 mm | 100 | 51 x 39 | M37.5 x 0.5 | 3Z4S-LE SV-PL375-SS | R-100 |
| 98-9000165-01 | 8 mm | 100 | 51.5 x 29.5 | M25.5 x 0.5 | 3Z4S-LE SV-PL255-SS | R-70/R-100 |
| 98-9000166-01 | 12 mm | 100 | 51.5 x 29.5 | M25.5 x 0.5 | 3Z4S-LE SV-PL255-SS | R-70/R-100 |
| 98-9000154-01 | 16 mm | 100 | 46.0 x 29.5 | M25.5 x 0.5 | 3Z4S-LE SV-PL255-SS | R-70/R-100 |
| 98-9000164-01 | 25 mm | 100 | 46.5 x 29.5 | M25.5 x 0.5 | 3Z4S-LE SV-PL255-SS | R-70/R-100 |
| 98-9000163-01 | 35 mm | 200 | 41.5 x 29.5 | M25.5 x 0.5 | 3Z4S-LE SV-PL255-SS | R-70/R-100 |

*For working distances shorter than the minimum working distance specified for the lens, an extension ring is required to focus the lens.

C-Mount Lens Polarizing Filters (only for Standard C-Mount Reading Lenses)



| Model | Filter Size |
|---------------------|-------------|
| 3Z4S-LE SV-PL225-SS | M22.5 P0.5 |
| 3Z4S-LE SV-PL255-SS | M25.5 P0.5 |
| 3Z4S-LE SV-PL270-SS | M27.0 P0.5 |
| 3Z4S-LE SV-PL305-SS | M30.5 P0.5 |
| 3Z4S-LE SV-PL340-SS | M34.0 P0.5 |
| 3Z4S-LE SV-PL355-SS | M35.5 P0.5 |
| 3Z4S-LE SV-PL375-SS | M37.5 P0.5 |
| 3Z4S-LE SV-PL405-SS | M40.5 P0.5 |
| 3Z4S-LE SV-PL520-SS | M52.0 P0.75 |
| 3Z4S-LE SV-PL550-SS | M55.0 P0.75 |
| 3Z4S-LE SV-PL620-SS | M62.0 P0.75 |

4. Non-Telecentric Macro C-Mount Lens Options for Small Codes

- Macro Lens – Low Cost, Small Size
- 0.5x Magnification – 17 × 14.2 mm Field of View
 - Able to Capture 2 mil (0.05 mm) Code at 7 PPE
- 1x Magnification – 8.5 × 7.1 mm Field of View
 - Able to Capture 1 mil (0.025 mm) Code at 7 PPE
- Use with External Lighting



| Part Number | Description | Opt. Mag. | Working Distance (mm) | F# | Depth of Field (mm) | TV Distortion | V440-F FOV (mm) |
|---------------------|-----------------|-----------|-----------------------|------|---------------------|---------------|-----------------|
| 3Z4S-LE VS-MC05-130 | 0.5x Macro Lens | 0.5x | 126.3 | 6.1 | 2.0 | 0.00% max. | 17 × 14.2 |
| 3Z4S-LE VS-MC1-80 | 1x Macro Lens | 1x | 82.4 | 8.14 | 0.7 | 0.00% max. | 8.5 × 7.1 |

5. Telecentric C-Mount Lens and Lighting Options for Small Codes

- High-Resolution Telecentric Lens – 150 lp/mm
- 1x Magnification – 8.5 × 7.1 mm Field of View
 - Able to capture 1 mil (0.024 mm) Code Size at 7 PPE
- 2x Magnification – 4.25 × 3.55 mm Field of View
 - Able to capture 0.5 mil (0.012 mm) Code Size at 7 PPE
- 65 or 110 mm Working Distance
- Coaxial Lighting Option or use with External Lighting



| Part Number | Description | Opt. Mag. | Working Distance (mm) | F# | NA | Depth of Field (mm) | TV Distortion | V440-F FOV (mm) |
|-------------------------|--|-----------|-----------------------|------|-------|---------------------|---------------|-----------------|
| 3Z4S-LE VS-TCH1-65-O | 1x Telecentric Lens | 1x | 68.8 | 9.9 | 0.05 | 0.6 | 0.01% | 8.5 × 7.1 |
| 3Z4S-LE VS-TCH1-110-O | 1x Telecentric Lens | 1x | 110.3 | 10.5 | 0.048 | 0.6 | 0.02% | 8.5 × 7.1 |
| 3Z4S-LE VS-TCH2-65-O | 2x Telecentric Lens | 2x | 65 | 13.6 | 0.074 | 0.3 | 0.01% | 4.25 × 3.55 |
| 3Z4S-LE VS-TCH2-110-O | 2x Telecentric Lens | 2x | 110.3 | 13.6 | 0.074 | 0.3 | 0.02% | 4.25 × 3.55 |
| 3Z4S-LE VS-TCH1-65CO-O | 1x Telecentric Lens with Coaxial Light | 1x | 68.8 | 9.9 | 0.05 | 0.6 | 0.03% | 8.5 × 7.1 |
| 3Z4S-LE VS-TCH1-110CO-O | 1x Telecentric Lens with Coaxial Light | 1x | 110.8 | 10.5 | 0.048 | 0.6 | 0.03% | 8.5 × 7.1 |
| 3Z4S-LE VS-TCH2-65CO-O | 2x Telecentric Lens with Coaxial Light | 2x | 65 | 13.5 | 0.074 | 0.3 | 0.03% | 4.25 × 3.55 |
| 3Z4S-LE VS-TCH2-110CO-O | 2x Telecentric Lens with Coaxial Light | 2x | 110.8 | 13.5 | 0.074 | 0.3 | 0.03% | 4.25 × 3.55 |


Telecentric Lens Coaxial Lighting – Option 1

- Red, White, or Blue Spot Light for Coaxial Lens (8 mm dia.)
- Analog Lighting Controller
- Extension Cable

| Part Number | Description* |
|--------------|---|
| FLV-EP0803R | Spot Light, Red (Fits TCH Telecentric Lens) |
| FLV-EP0803W | Spot Light, White (Fits TCH Telecentric Lens) |
| FLV-EP0803B | Spot Light, Blue (Fits TCH Telecentric Lens) |
| FLV-ATC10405 | Analog Lighting Controller for FLV-EP Series |
| FLV-XC1EP | Extension Cable (between Light and Controller) 1 Meter |
| FLV-XC2EP | Extension Cable (between Light and Controller) 2 Meters |
| FLV-XC3EP | Extension Cable (between Light and Controller) 3 Meters |
| FLV-XC5EP | Extension Cable (between Light and Controller) 5 Meters |

*Note: See the **Omron Vision Accessories Catalog** for full descriptions.

Important: This option uses standard components available in Japan. Please note that this power supply cannot be sold in the U.S. or the EU. Refer to **Telecentric Lens Coaxial Lighting – Option 2** for alternate components.

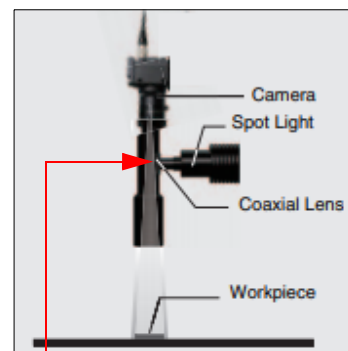


Telecentric Lens Coaxial Lighting – Option 2

- Blue Spot Light for Coaxial Lens (8 mm dia.)
- 24V DC / 0.7W
- Flying Leads Extension Cable to Power Source
- Optional Power Supply

| Part Number | Description |
|---------------|--|
| 98-9000304-01 | Kit, Spotlight, Blue, Telecentric Lens with Flying Leads Extension Cable |
| NER-011504100 | 24VDC 2.5A DIN Mount Power Supply* |
| NER-030028300 | AC Power Cord for DSPxx Power Supply, U.S.* |
| NER-030028400 | AC Power Cord for DSPxx Power Supply, EU* |

*Important: This option can be sold in the U.S., EU, and all other regions, as it can be powered directly from 24V, or can use the listed UL-compliant and CE-compliant **DSP60** power supply.

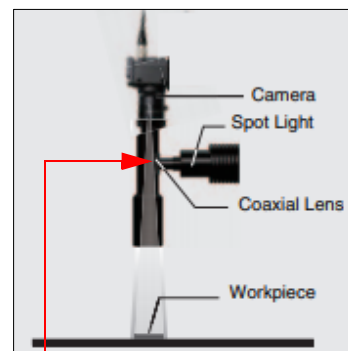


6. Cables

General Wiring Options

| Appearance | Category | Length / Spec | Part Number |
|--|--|-----------------------------|---------------|
|  | Standard Ethernet Cables - Industrial High-Flex GigE Ethernet Cables with Jack Screws and RJ45 Connector* | 2 Meters | 98-000133-01 |
| | | 5 Meters | 98-000134-01 |
| | | 7 Meters | 98-000134-02 |
|   | Reader to QX-1 Interconnect Cables M12 Socket to M12 Plug QX-1 is used as breakout module for common IO signals and power. | 1 Meter | V430-WQ-1M |
| | M12 Socket to M12 Plug, with Power Filter | 300 mm | V430-WQF-1M |
| | Reader to QX-1 Interconnect Cables M12 Socket to M12 Plug QX-1 is used as breakout module for common IO signals and power. | 3 Meters | V430-WQ-3M |
| | 5 Meters | V430-WQ-5M | |
|  | QX-1 M12 to Smart Light Power and Strobe Control Cables M12 Plug on QX-1 to 5 Pin Socket on Light | 3 Meters – Continuous Power | 61-000204-01 |
| | | 3 Meters – Strobe Control | 61-000218-01 |
|  | Y Cable, Reader/Power and Smart Light Power (Continuous On) | 1 Meter | 61-9000135-01 |
| | Y Cable, Reader/Power and Smart Light Strobe Control | 1 Meter | 61-9000137-01 |
|   | M12 to Flying Leads Cable, Straight Power, IO, RS-232, USB | 3 Meters | V430-W8-3M |
| | M12 to Flying Leads Cable, with Power Filter | | V430-W8F-3M |
| | M12 to Flying Leads Cable, Straight Power, IO, RS-232, USB | 5 Meters | V430-W8-5M |
| | M12 to Flying Leads Cable, with Power Filter | | V430-W8F-5M |
|  | M12 to RS-232 Breakout | 1 Meter | V430-WR-1M |
| | | 3 Meters | V430-WR-3M |
|  | Reader to QX-1 Interconnect Cables with RS-232 Breakout | 2.7 Meters | V430-WQR-3M |
|  | Reader to QX-1 Interconnect Cables with USB Keyboard Wedge Breakout | 2.7 Meters | V430-WQK-3M |
|  | Power Supply, AC100-240V, +24V DC, M12 12-Pin Socket | 1 Meter US/Euro Plug | 97-000012-01 |

***Important:** Standard Omron FJ-VSG Ethernet cables are available in alternative and longer lengths.

7. Power Supply

| Appearance | Category | Length/Spec | Part Number |
|---|---|-------------------------|--------------|
|  | Power Supply, 100-240VAC, +24VDC, M12 12-Pin Socket | 1 Meter US/Euro Plug | 97-000012-01 |


8. Lighting Options

The V440-F is designed for use with external lighting. It can be equipped with any vendor's continuous power or strobe lighting. Strobe lights are triggered using Output 3 on the M12 IO connector through a flying leads cable.

Omron also offers a line of Smart Lights that can be used in continuous or strobed mode. NERLITE Smart Series Lights have a built-in strobe controller, so no external strobe controller is needed. Dedicated cable sets allow you to wire the NERLITE Smart Series Lights directly to the V440-F.


NERLITE Smart Series Lights include Ring Lights, DOALs, Large Area Bar Lights (MAX Lights), and a dedicated label-reading light called Pharmalite. Ring Lights are the most appropriate choice for the V440-F. Ring Lights, Ring Light accessories, and mounting brackets are show below.

NERLITE Smart Series R-70 and R-100 Ring Lights

| Product | Appearance | Type | Part Number |
|---|---|-------------------------------------|------------------------|
| V440-F Smart Series Ring Light Kits  |  | R-70, 70 mm RED Ring Light | NER-011660900G* |
| | | R-70, 70 mm WHITE Ring Light | NER-011660910G |
| | | R-70, 70 mm BLUE Ring Light | NER-011660920G |
| | | R-100, 100 mm RED Ring Light | NER-011661100G* |
| | | R-100, 100 mm WHITE Ring Light | NER-011661110G |
| | | R-100, 100 mm BLUE Ring Light | NER-011661120G |


***Note:** The R-70 and R-100 Red Ring Lights are normally stock lights with short lead times. Blue and White Ring Lights are subject to standard NERLITE lead times. Check on availability before placing order.

NERLITE Smart Series R-70 and R-100 Ring Light Polarizer Kits

| Appearance | Type | Part Number |
|---|---|----------------|
|  | R-70 Smart Series Ring Light Polarizer Kit | 98-9000301-01* |
| | R-100 Smart Series Ring Light Polarizer Kit | 98-9000302-01* |

***Note:** Smart Series Ring Light Polarizer Kits must be used in conjunction with a cross-polarizer on the lens. See lens polarizer section of the datasheet to determine the correct part number to match the filter thread size of the lens.


NERLITE Smart Series R-70 and R-100 Ring Light Mounting Kits

| Appearance | Type | Part Number |
|---|--|-------------|
|  | R-70 Smart Series Ring Light Mounting Kit | V440-AM1* |
| | R-100 Smart Series Ring Light Mounting Kit | V440-AM2* |


***Note:** The C-Mount lens nests down inside the light aperture. The R-70 has a 43.4 mm opening. The R-100 has a 69.5 mm opening. Larger diameter lenses may not fit inside the R-70 ring light. Please see light size compatibility chart in the lens tables.

NERLITE Smart Series R-70 and R-100 Ring Light Specifications, Dimensions, Connections

| Size | Part Number | Description | Wavelength | Current @ 24 V | Strobe Current | Millicandela Continuous | Millicandela Strobe |
|--------------|----------------|---------------|------------|----------------|----------------|-------------------------|---------------------|
| R-70 | NER-011660900G | 70 mm, RED | 623 nm | 172 mA | 1.2 A | 349281 | 3062913 |
| | NER-011660910G | 70 mm, WHITE | 6700 K | 160 mA | 850 mA | 352205 | 1739631 |
| | NER-011660920G | 70 mm, BLUE | 470 nm | 160 mA | 850 mA | 143217 | 618814 |
| R-100 | NER-011661100G | 100 mm, RED | 623 nm | 255 mA | 1.7 A | 516015 | 4370388 |
| | NER-011661110G | 100 mm, WHITE | 6700 K | 235 mA | 1.1 A | 495814 | 2338577 |
| | NER-011661120G | 100 mm, BLUE | 470 nm | 235 mA | 1.1 A | 201005 | 848215 |

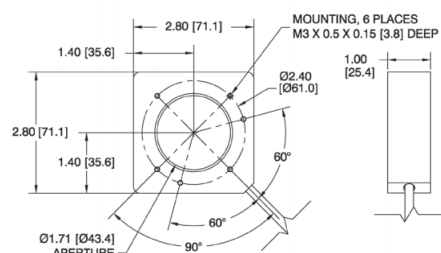

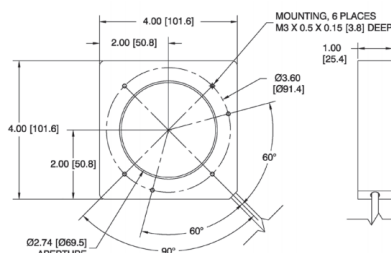


Smart Series R-70 Ring Light Dimensions




Smart Series R-100 Ring Light Dimensions

9. Other Accessories

| Appearance | Category | Length / Spec | Part Number |
|---|---|---------------------------------|---------------|
|  | QX-1 Interconnect Module – Power, Trigger, Smart Light Control Breakout | N/A | 98-000103-02 |
|  | QX-1 Photo Sensor, M12 4-Pin Plug, NPN | 2 Meters – Light ON/ Dark ON | 99-9000016-01 |
|  | QX-1 Field-Wireable M12 4-Pin Plug for Any Trigger Source or Photo Sensor | Screw Terminals | 98-9000239-01 |

System Configuration Examples

System Configuration Example 1: FLV Series or Other External Lighting

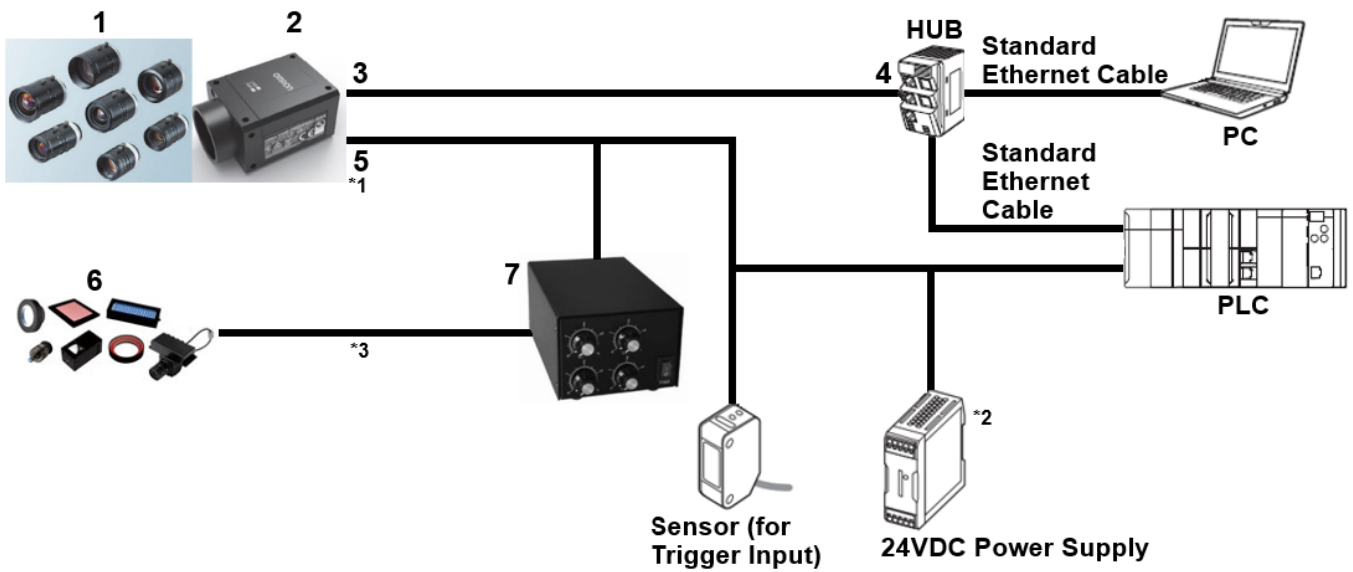


| Drawing Reference | Category | Part Number |
|-------------------|--|--|
| 1 | C-Mount Lens | 3Z4S-□□, 98-9000□□□-01 |
| 2 | V440-F C-Mount 5 MP Camera | V440-FXXX50M-NN□ |
| 3 | Industrial High-Flex GigE Ethernet Cable with Jack Screws and RJ45 Connector | 98-00013□-0□ |
| 4 | PoE (Power over Ethernet) | Select a cable that can supply power via Ethernet. |
| | Industrial Switching HUB | Example: W4S1- □□□Series |
| 5 | M12-to-Flying Leads Cable | V430-W8□□□-□M |
| 6 | FLV Lighting | FLV-□ |
| 7 | Lighting Controller | FLV-ATC□, 3Z4S-LT IDGB□ |

*1. The V430-WQ cable (excluding V430-WQR / V430-WQK) can be used as an extension of the V430-W8 cable.

*2. A 24VDC power supply is not needed for the V440-F if a PoE switching HUB is used.

*3. Any vendor's lighting and power supply can be used with the V440-F. The I/O cable provides strobe signal to light power supply.

System Configuration Example 2: NERLITE Smart Series Light with QX-1

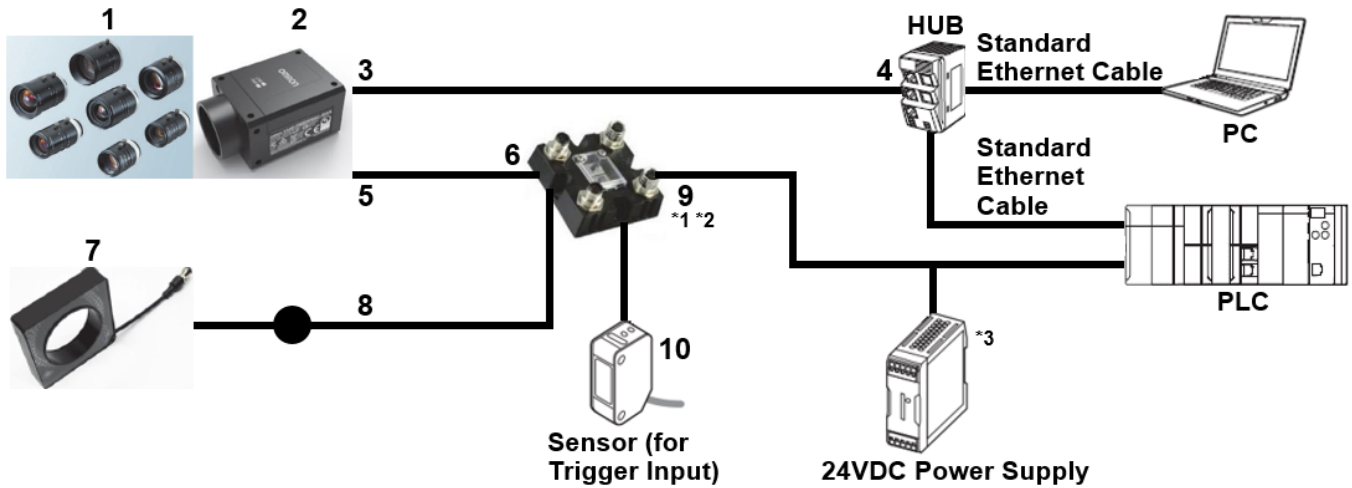


| Drawing Reference | Category | Part Number |
|-------------------|--|--|
| 1 | C-Mount Lens | 3Z4S-□□, 98-9000□□□-01 |
| 2 | V440-F C-Mount 5 MP Camera | V440-FXXXY50M-NN□ |
| 3 | Industrial High-Flex GigE Ethernet Cable with Jack Screws and RJ45 Connector | 98-00013□-0□ |
| 4 | PoE (Power over Ethernet) | Select a cable that can supply power via Ethernet. |
| | Industrial Switching HUB | Example: W4S1-□□□ Series |
| 5 | Reader-to-QX-1 Interconnect Cable | V430-WQ-1M |
| 6 | QX-1 Interface Device | 98-000103-02 |
| 7 | NERLITE Smart Series R-70 or R-100 Ring Light | NER-01166□□□□G |
| 8 | Integrated Light Cable | 61-0002□□-01 |
| 9 | M12-to-Flying Leads Cable | V430-W8□□□-□M |
| 10 | QX-1 Photo Sensor | 99-9000016-01 |
| | QX-1 Field-Wireable M12 4-Pin Plug for Any Trigger Source or Photo Sensor | 98-9000239-01 |

*1. The V430-WQ cable (excluding V430-WQR / V430-WQK) can be used as an extension of the V430-W8 cable.

*2. It is possible to connect a 97-000012-01 power supply instead of V430-W8. However, since there is no I/O line, you cannot connect to the sensor or PLC.

*3. A 24VDC power supply is not needed for the V440-F if a PoE switching HUB is used.

System Configuration Example 3: NERLITE Smart Series Light without QX-1

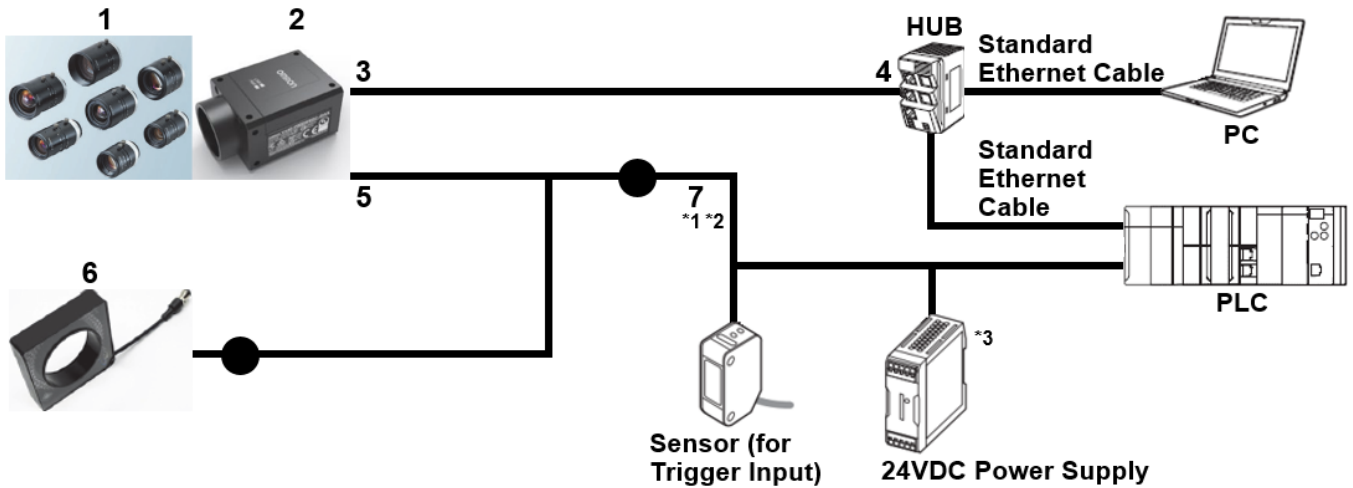


| Drawing Reference | Category | Part Number |
|-------------------|--|--|
| 1 | C-Mount Lens | 3Z4S-□□, 98-9000□□□-01 |
| 2 | V440-F C-Mount 5 MP Camera | V440-FXXXY50M-NN□ |
| 3 | Industrial High-Flex GigE Ethernet Cable with Jack Screws and RJ45 Connector | 98-00013□-0□ |
| 4 | PoE (Power over Ethernet) Industrial Switching HUB | Select a cable that can supply power via Ethernet. Example: W4S1-□□□ Series |
| 5 | Integrated Light Y Cable | 61-900013□-01 |
| 6 | NERLITE Smart Series R-70 or R-100 Ring Light | NER-01166□□□□G |
| 7 | M12-to-Flying Leads Cable | V430-W8□□□-□M |

*1. The V430-WQ cable (excluding V430-WQR / V430-WQK) can be used as an extension of the V430-W8 cable.

*2. It is possible to connect a 97-000012-01 power supply instead of V430-W8. However, since there is no I/O line, you cannot connect to the sensor or PLC.

*3. A 24VDC power supply is not needed for V440-F if a PoE switching HUB is used.


System Configuration Example 4: Minimum Power over Ethernet (PoE) Configuration

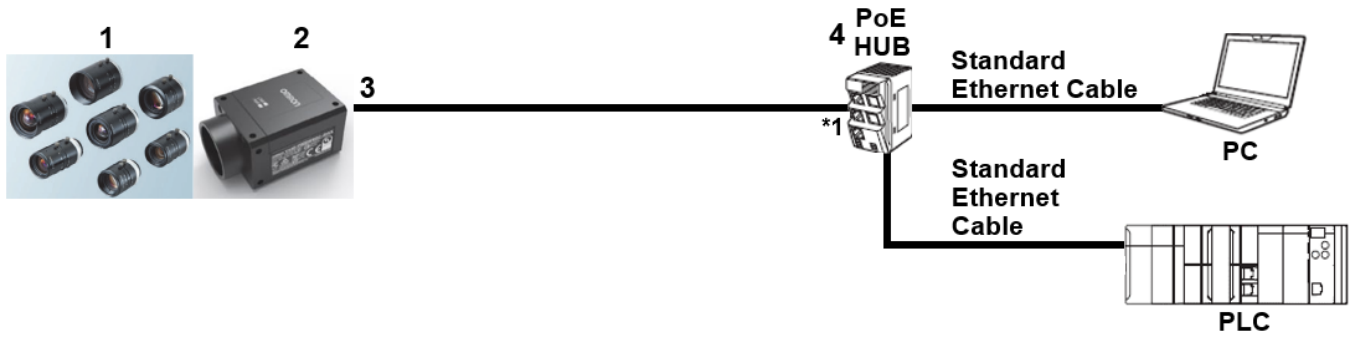

| Drawing Reference | Category | Part Number |
|-------------------|--|--|
| 1 | C-Mount Lens | 3Z4S-□□, 98-9000□□□-01 |
| 2 | V440-F C-Mount 5 MP Camera | V440-FX□□Y50M-NN□ |
| 3 | Industrial High-Flex GigE Ethernet Cable with Jack Screws and RJ45 Connector | 98-00013□-0□ |
| 4 | PoE (Power over Ethernet) HUB | Select a cable that can supply power via Ethernet. |

*1. A 24VDC power supply is not needed for the V440-F if a PoE switching HUB is used.


System Configuration Example 5: Minimum External Power Configuration

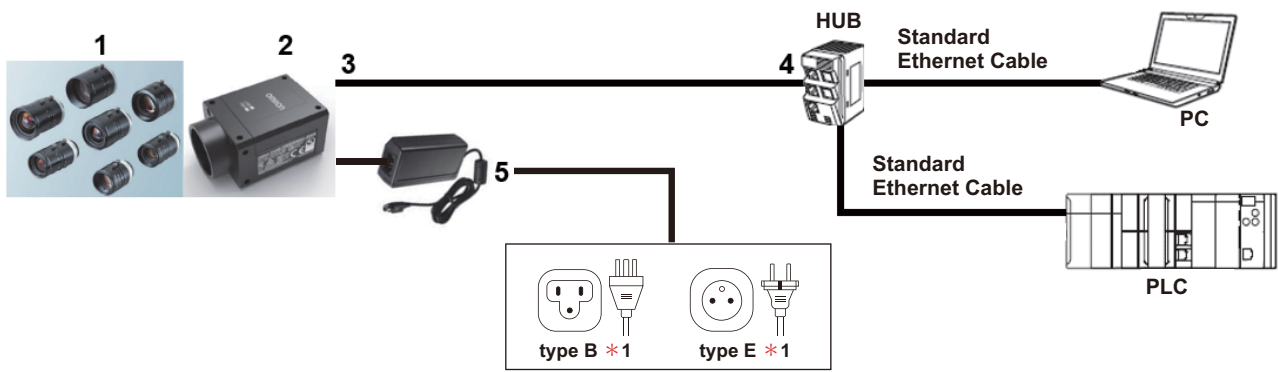

| Drawing Reference | Category | Part Number |
|-------------------|--|---------------------------|
| 1 | C-Mount Lens | 3Z4S-□□, 98-9000□□□-01 |
| 2 | V440-F C-Mount 5 MP Camera | V440-F□□□□50M-NN□ |
| 3 | Industrial High-Flex GigE Ethernet Cable with Jack Screws and RJ45 Connector | 98-00013□-0□ |
| 4 | Industrial Switching HUB | Example: W4S1-□□□□ Series |
| 5 | Power Supply, 100-240VAC, +24VDC, M12 12-Pin Socket | 97-000012-01 |

*1. There are many types of outlet plugs for the power supply. Select a suitable plug type for your environment.
(Example: type B for Japan, type E for Europe)



System Configuration Example 6: USB Configuration

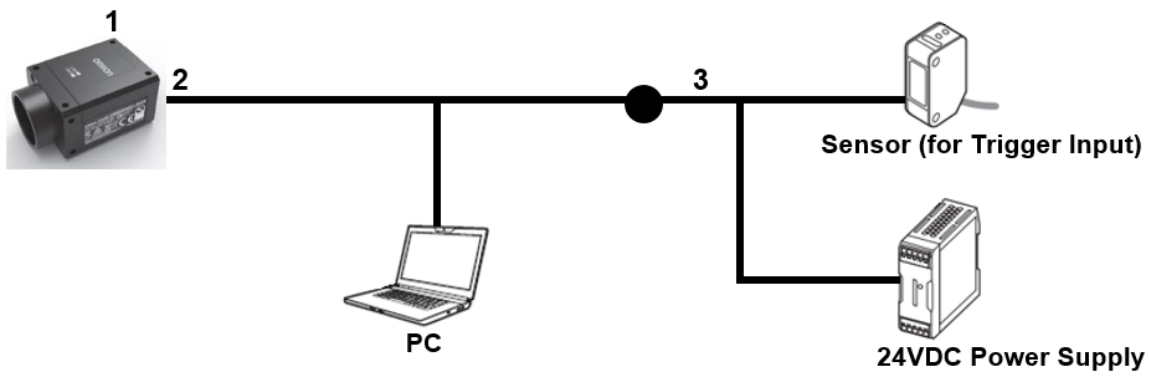

| Drawing Reference | Category | Part Number |
|-------------------|--|------------------|
| 1 | V440-F C-Mount 5 MP Camera | V440-FXXX50M-NN□ |
| 2 | Reader-to-QX-1 Interconnect Cable with USB Keyboard Wedge Breakout | V430-WQK-3M* |
| 3 | M12-to-Flying Leads Cable | V430-W8□□□-□M |

*Insert the V430-WQK-3M cable between the V440-F and the V430-W8□□□-□M cable.

System Configuration Example 7: RS-232C Configuration

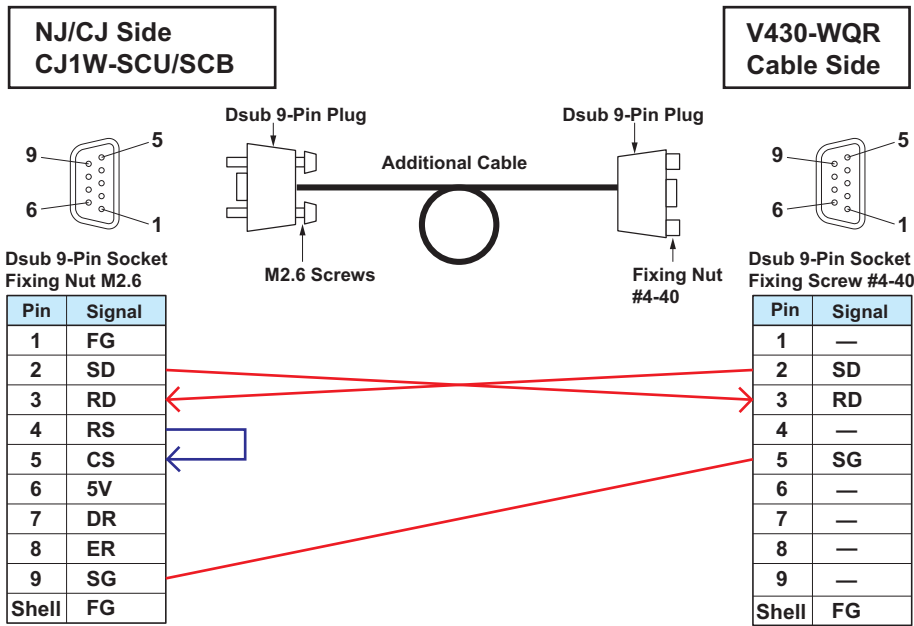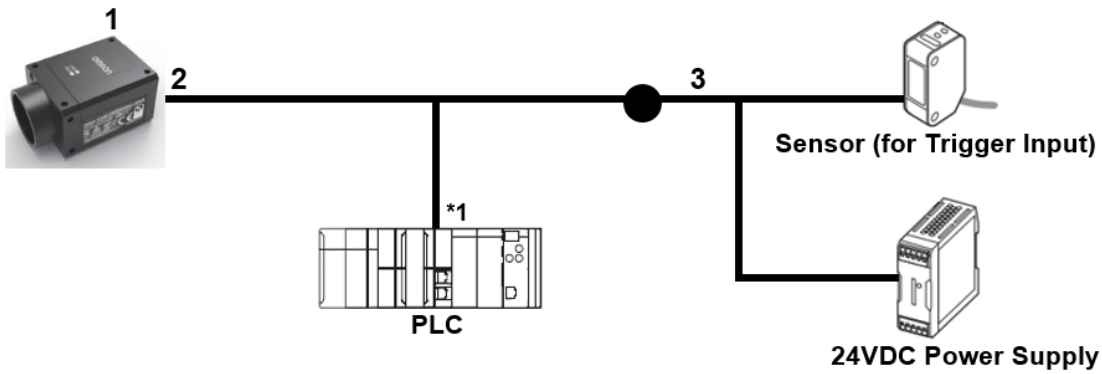

Note: If the communication is non-procedural, only the three red connections are required.

| Drawing Reference | Category | Part Number |
|-------------------|--|------------------|
| 1 | V440-F C-Mount 5 MP Camera | V440-FXXX50M-NN□ |
| 2 | Reader-to-QX-1 Interconnect Cable with RS-232 Breakout | V430-WQR-3M* |
| 3 | M12-to-Flying Leads Cable | V430-W8□□□-□M |

*Insert the V430-WQR-3M cable between the V440-F and the V430-W8 cable.

*1. If connecting Omron's CS/CJ/NJ Controller, check the connector shape and signal lines (pin assignments) and prepare the additional RS-232C conversion cable. If connecting to Omron's NX Machine Automation Controller, no additional RS-232C cable is required.

10. Determining the Optical Setup

The following four-step process determines the optimal lens focal length, field of view, and camera standoff to read the intended code successfully.

Step 1: Determine the minimum element size of the code (usually expressed in mils).

For a 1D barcode, this is the size of the thinnest bar of the code. For a 2D code, this is the size of a single square element in the code. The element size is usually known by the customer.



Step 2: Use the guidelines below to determine the approximate PPE (Pixels Per Element) required to read the code successfully.

Pixels Per Element (PPE) is defined as the number of pixels that span the smallest feature of the code. A certain minimum number of pixels is required to read successfully. For 1D codes, PPE refers to the number of image pixels across the narrowest bar in the barcode. For 2D codes, PPE refers to the number of image pixels across a single cell within the 2D code.

The following are general guidelines for typical PPE requirements based on the code type and application. It is acceptable to have too many Pixels Per Element. It can however slow down the read time.

| Code Type | Minimum PPE | Preferred PPE | PPE for Code Grading |
|-------------------------------|-------------|---------------|----------------------|
| 1D Code – High Contrast Label | 1.6 | 2 | 5 |
| 1D Code – Direct Part Mark | 2 | 2.5 | 5 |
| 2D Code – High Contrast Label | 2.75 | 3.5 to 5 | 8 to 10 |
| 2D Code – Direct Part Mark | 3.5 | 5 | 8 to 10 |

Step 3: Based on the suggested PPE from the above table, use the table below to determine the ideal field of view that delivers the required PPE.

The **Readability Table** below shows, for all common code sizes, the maximum field of view that will result in the required PPE. Results for **2, 3.5, 5, and 10** PPE are given.

| FOV Size (mm) to Achieve a Specific PPE for all Common Code Sizes | | | | |
|---|---------|-----------|---------|----------|
| Thin Bar or 2D Cell Size | PPE = 2 | PPE = 3.5 | PPE = 5 | PPE = 10 |
| 0.5 mil (0.0127 mm) | 15.6 | 8.9 | 6.3 | 3.1 |
| 1 mil (0.0254 mm) | 31.3 | 17.9 | 12.5 | 6.3 |
| 1.5 mil (0.0381 mm) | 46.9 | 26.8 | 18.8 | 9.4 |
| 2 mil (0.0508 mm) | 62.6 | 35.8 | 25.0 | 12.5 |
| 2.5 mil (0.0635 mm) | 78.2 | 44.7 | 31.3 | 15.6 |
| 3.3 mil (0.084 mm) | 103.5 | 59.1 | 41.4 | 20.7 |
| 5 mil (0.127 mm) | 156.5 | 89.4 | 62.6 | 31.3 |
| 7.5 mil (0.19 mm) | 234.1 | 133.8 | 93.6 | 46.8 |
| 10 mil (0.25 mm) | 312.9 | 178.8 | 125.2 | 62.6 |
| 13 mil (0.33 mm) | 406.6 | 232.3 | 162.6 | 81.3 |
| 15 mil (0.38 mm) | 469.4 | 268.2 | 187.8 | 93.9 |
| 20 mil (0.5 mm) | 625.9 | 357.6 | 250.3 | 125.2 |
| 30 mil (0.76 mm) | 936.3 | 535.0 | 374.5 | 187.3 |
| 40 mil (1 mm) | 1251.7 | 715.3 | 500.7 | 250.3 |
| 50 mil (1.25 mm) | 1564.6 | 894.1 | 625.9 | 312.9 |

Step 4: Based on ideal field of view, use the Field of View / Working Distance charts below to choose the best lens and camera standoff distance combination that most closely matches the application requirements.

Example: Read a 2D, 7.5 mil code.


From the guidelines we can determine that **3.5 PPE** is a good starting point.

From the **PPE to FOV table** above, we see the ideal field of view for achieving a **PPE of 3.5** on a **7.5 mil code** is **133.8 mm**.

From the table below, we see there are multiple lens options and working distance options that come close*.

- **Option 1:** F = 9 mm, Working Distance = 150.
- **Option 2:** F = 12.5 mm, Working Distance = 200.
- **Option 3:** F = 16 mm, Working Distance = 250.

***Note:** Please note that it normal to interpolate between the set working distances in the chart to come up with the best answer. ALWAYS TEST the solution on your exact samples. You can always move the camera in to increase the resolution.

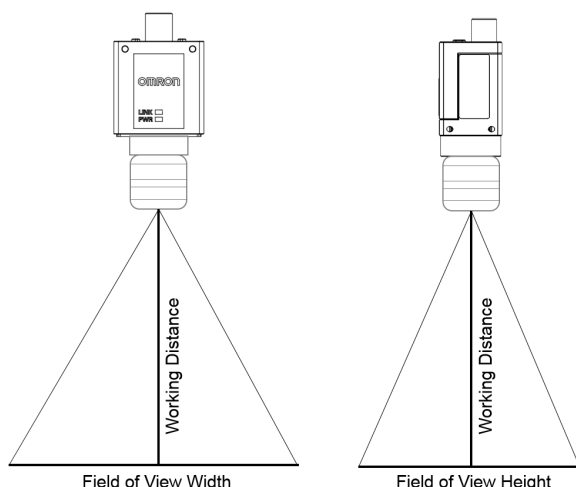

General lens formulas for any combination, given working distance, focal length, or field of view width:

Field of View Width = 8.5 x Working Distance / Focal Length

Field of View Height = 7.093 x Working Distance / Focal Length

Focal Length = 8.5 x Working Distance / Field of View Width

Working Distance = Field of View Width x Focal Length / 8.5

Field of View for 25* to 500 mm Working Distance

| Field of View (mm x mm) at Specific Working Distances (mm) | | | | | | | | | | | | |
|--|---------|---------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Lens FL | 25 | 50 | 75 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 |
| F = 6 | 35 x 30 | 71 x 59 | 106 x 89 | 142 x 118 | 213 x 177 | 283 x 236 | 354 x 296 | 425 x 355 | 496 x 414 | 567 x 473 | 638 x 532 | 708 x 591 |
| F = 8 | 27 x 22 | 53 x 44 | 80 x 66 | 106 x 89 | 159 x 133 | 213 x 177 | 266 x 222 | 319 x 266 | 372 x 310 | 425 x 355 | 478 x 399 | 531 x 443 |
| F = 9 | 24 x 20 | 47 x 39 | 71 x 59 | 94 x 79 | 142 x 118 | 189 x 158 | 236 x 197 | 283 x 236 | 331 x 276 | 378 x 315 | 425 x 355 | 472 x 394 |
| F = 12.5 | 17 x 14 | 34 x 28 | 51 x 43 | 68 x 57 | 102 x 85 | 136 x 113 | 170 x 142 | 204 x 170 | 238 x 199 | 272 x 227 | 306 x 255 | 340 x 284 |
| F = 16 | 13 x 11 | 27 x 22 | 40 x 33 | 53 x 44 | 80 x 66 | 106 x 89 | 133 x 111 | 159 x 133 | 186 x 155 | 213 x 177 | 239 x 199 | 266 x 222 |
| F = 25 | 9 x 7 | 17 x 14 | 26 x 21 | 34 x 28 | 51 x 43 | 68 x 57 | 85 x 71 | 102 x 85 | 119 x 99 | 136 x 113 | 153 x 128 | 170 x 142 |
| F = 35 | 6 x 5 | 12 x 10 | 18 x 15 | 24 x 20 | 36 x 30 | 49 x 41 | 61 x 51 | 73 x 61 | 85 x 71 | 97 x 81 | 109 x 91 | 121 x 101 |
| F = 50 | 4 x 4 | 9 x 7 | 13 x 11 | 17 x 14 | 26 x 21 | 34 x 28 | 43 x 35 | 51 x 43 | 60 x 50 | 68 x 57 | 77 x 64 | 85 x 71 |
| F = 75 | 3 x 2 | 6 x 5 | 9 x 7 | 11 x 9 | 17 x 14 | 23 x 19 | 28 x 24 | 34 x 28 | 40 x 33 | 45 x 38 | 51 x 43 | 57 x 47 |
| F = 100 | 2 x 2 | 4 x 4 | 6 x 5 | 9 x 7 | 13 x 11 | 17 x 14 | 21 x 18 | 26 x 21 | 30 x 25 | 34 x 28 | 38 x 32 | 43 x 35 |

*For working distances shorter than the minimum working distance specified for the lens, an extension ring is required to focus the lens.


Field of View at 600 to 2500 mm Working Distance

| Field of View (mm x mm) at Specific Working Distances (mm) | | | | | | | | | | |
|--|-----------|-----------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Lens FL | 600 | 700 | 800 | 900 | 1000 | 1250 | 1500 | 1750 | 2000 | 2500 |
| F = 6 | 850 x 709 | 992 x 828 | 1133 x 946 | 1275 x 1064 | 1417 x 1182 | 1771 x 1478 | 2125 x 1773 | 2479 x 2069 | 2833 x 2364 | 3542 x 2956 |
| F = 8 | 638 x 532 | 744 x 621 | 850 x 709 | 956 x 798 | 1063 x 887 | 1328 x 1108 | 1594 x 1330 | 1859 x 1552 | 2125 x 1773 | 2656 x 2217 |
| F = 9 | 567 x 473 | 661 x 552 | 756 x 631 | 850 x 709 | 944 x 788 | 1181 x 985 | 1417 x 1182 | 1653 x 1379 | 1889 x 1576 | 2361 x 1970 |
| F = 12.5 | 408 x 340 | 476 x 397 | 544 x 454 | 612 x 511 | 680 x 567 | 850 x 709 | 1020 x 851 | 1190 x 993 | 1360 x 1135 | 1700 x 1419 |
| F = 16 | 319 x 266 | 372 x 310 | 425 x 355 | 478 x 399 | 531 x 443 | 664 x 554 | 797 x 665 | 930 x 776 | 1063 x 887 | 1328 x 1108 |
| F = 25 | 204 x 170 | 238 x 199 | 272 x 227 | 306 x 255 | 340 x 284 | 425 x 355 | 510 x 426 | 595 x 497 | 680 x 567 | 850 x 709 |
| F = 35 | 146 x 122 | 170 x 142 | 194 x 162 | 219 x 182 | 243 x 203 | 304 x 253 | 364 x 304 | 425 x 355 | 486 x 405 | 607 x 507 |
| F = 50 | 102 x 85 | 119 x 99 | 136 x 113 | 153 x 128 | 170 x 142 | 213 x 177 | 255 x 213 | 298 x 248 | 340 x 284 | 425 x 355 |
| F = 75 | 68 x 57 | 79 x 66 | 91 x 76 | 102 x 85 | 113 x 95 | 142 x 118 | 170 x 142 | 198 x 166 | 227 x 189 | 283 x 236 |
| F = 100 | 51 x 43 | 60 x 50 | 68 x 57 | 77 x 64 | 85 x 71 | 106 x 89 | 128 x 106 | 149 x 124 | 170 x 142 | 213 x 177 |

Important: See [V440-F Lens Selection Based on Focal Length](#) on the next page.

V440-F

V440-F Lens Selection Based on Focal Length

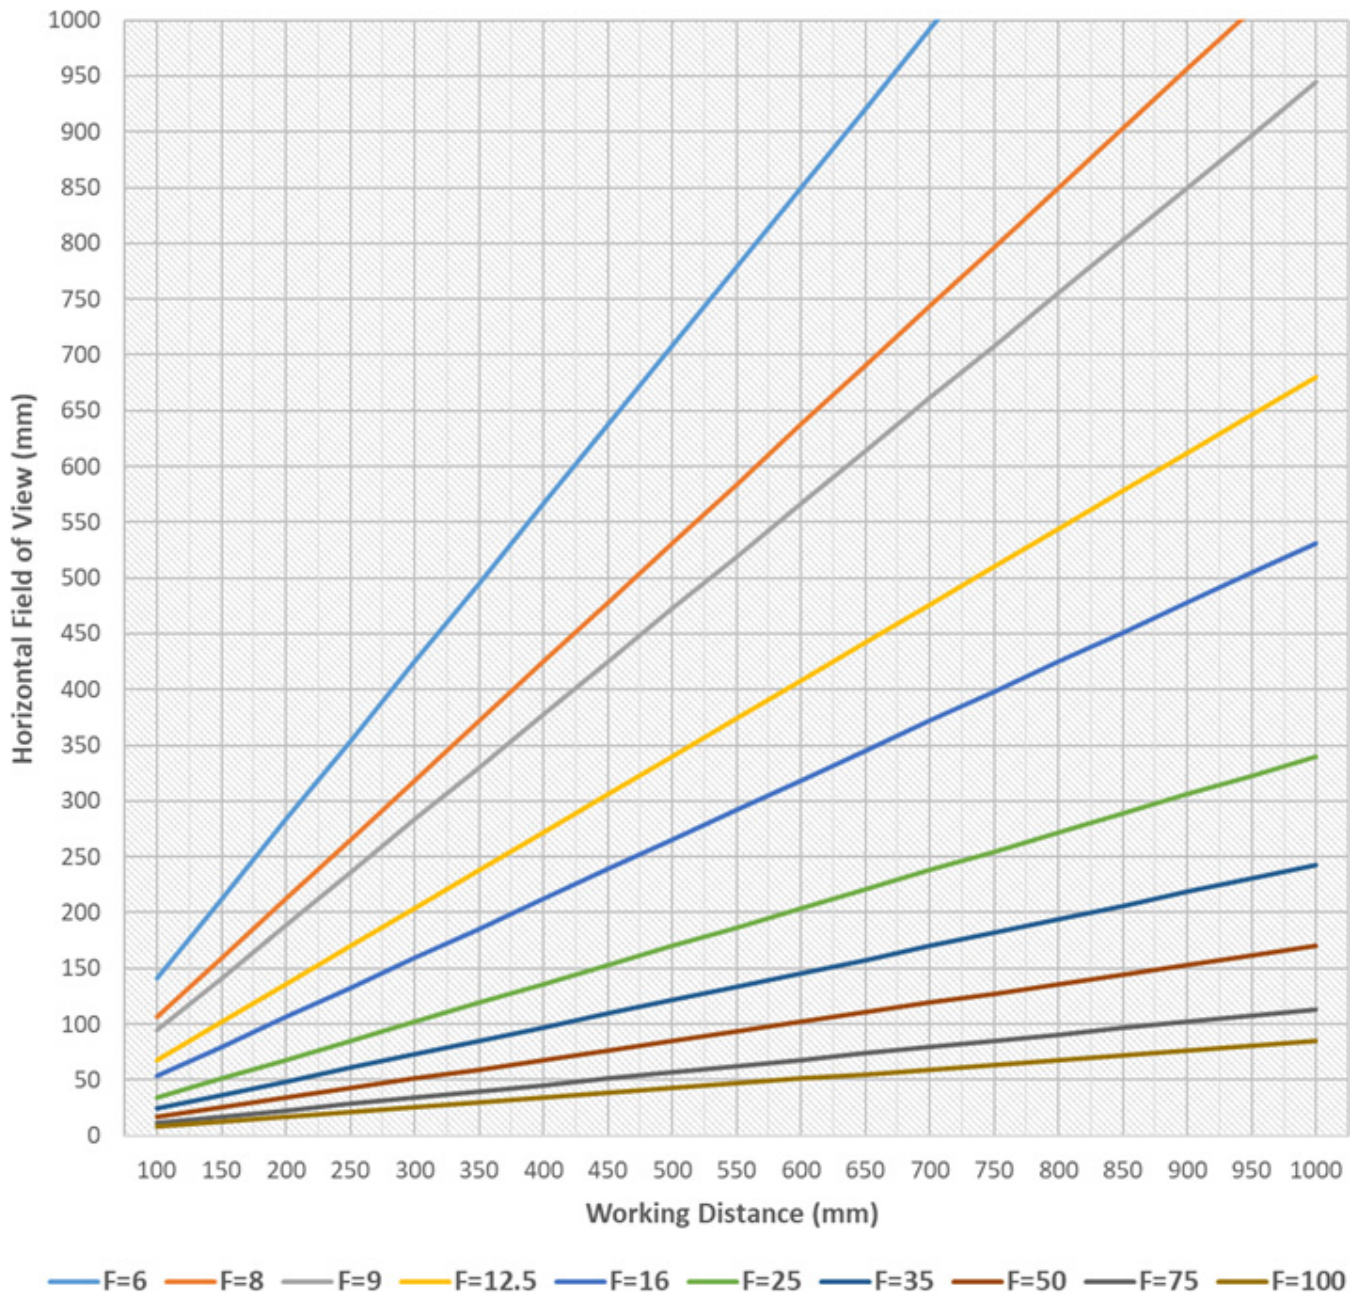


Ratings and Specifications

| V440-F | | |
|------------------------------------|----------------------------------|---|
| Symbologies *1 | 1D Symbologies | Code 39, Code 128, BC412, Interleaved 2 of 5, UPC/EAN, Codabar, Code 93, Pharmacode, PLANET, Postnet, Japanese Post, Australian Post, Royal Mail, Intelligent Mail, KIX |
| | 2D Symbologies | Data Matrix (ECC 0-200), QR Code, Micro QR Code, Aztec Code, DotCode, DMRE |
| | Stacked Symbologies | PDF417, MicroPDF417, GS1 Databar (Composite and Stacked) |
| Reading Performance *2 | Number of Reading Digits | No Upper Limit (depending on bar width and reading distance) |
| | Reading Distance / Field of View | Based on Lens Selection and Code Size |
| | Pitch Angle (α) *3 | $\pm 30^\circ$ |
| | Skew Angle (β) *3 | $\pm 30^\circ$ |
| | Tilt Angle (γ) *3 | $\pm 180^\circ$ |
| Image | Resolution, Pixel Size | 2464 (H) x 2056 (V) – 3.45 μm Pixel Size |
| | Color / Monochrome | Monochrome CMOS |
| | Shutter | Global Shutter |
| | Frames per Second | 35 FPS for 5 MP |
| | Exposure | 16 μs to 400 msec |
| Image Logging | | FTP |
| Trigger | | External Trigger (Edge or Level), Communication Trigger (Ethernet, RS-232C) |
| Trigger to Strobe Latency + Jitter | | 320 μs + 65 μs |
| I/O Specifications | Input Signals | Trigger Input, New Master, and Default – Bi-Directional Inputs, Optoisolated, 4.5 – 28 V rated (10 mA @ 28 VDC) |
| | Output Signals | 3 Signals: Bi-Directional, Optoisolated, 1 – 28 V rated, ($I_{CE} < 100$ mA at 24 VDC, current limited by user) |
| Communication | Connectivity | RS-232C, Ethernet TCP/IP, EtherNet/IP™, PROFINET |
| | Ethernet Specifications | 1000BASE-T |
| Indicator LEDs | | LINK (Amber), PWR (Green) |
| Power Supply Voltage | | Power over Ethernet (IEEE 802.3af) / 24 VDC +/- 20%, External Input via IO *4 |
| Current Consumption | | PoE (44-57 VDC): 0.10 A or 24 VDC: 0.15 A |
| Weight | Main Body Only | Approx. 103.4 g |
| | Packaging Weight | Approx. 219.1 g |
| Dimensions | | 40 mm (W) x 61 mm (D) x 30 mm (H) Note: Depth measurement excludes connector |
| Accessories | | ReadMeFirst, CE Compliance Sheet, Protocol Support Table |
| Materials | | Aluminum Diecast, Alumite (Black) |
| Software | | WebLink 3.0 |
| Environmental / Immunity *5 | Operating Temperature | 0° to 40° C |
| | Storage Temperature | -25° to 65° C (No Icing or Condensation) |
| | Ambient Atmosphere | No Corrosive Gases |
| | Humidity (Operating and Storage) | 5% to 95% (Non-Condensing) |
| | Destructive Vibration Resistance | Oscillation Frequency: 10 to 150Hz, Half Amplitude: 0.35 mm, Vibration Direction: X/Y/Z, Sweep Time: 8 Minutes / Count, Sweep Count: 10 Times |
| | Drop Specification | Impact Force: 150 m/s ² , Test Direction: 6 Directions, 3 Times Each (Up / Down, Front / Behind, Left / Right) |
| | Water Resistance Rating | IP40 per IEC 60529 |
| EMC / Safety | | FCC part 15 Subpart B, ICES-003, EN 55032, EN 55035, AS/NZS CISPR32, CNS 13438, KN32, KN35, UL 62368-1, UL 60950-1 FCC, UL, CE, UKCA, RCM, KC *6 |

*1. These symbologies are supported based on Omron's read capability validation standard. Omron recommends that validation be performed for each application.

*2. Unless otherwise specified, reading performance is defined with center of field of view, angle $R = \infty$.

*3. Pitch angle Skew angle Tilt angle

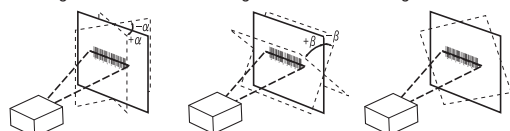

*4. Code reader operates External Input at 24 VDC when supplied at the same time as PoE.

*5. In an electrically noisy environment, use only the V440-F in combination with a noise filter cable (V430-W□F-□M) to ensure proper operation.


*6. FCC = United States
UL = United States
CE = European Union
UKCA = Great Britain (England / Wales / Scotland)
RCM = Australia / New Zealand
KC = South Korea

V440-F




Dimensions

V440-F C-Mount Code Reader




(Unit: mm)

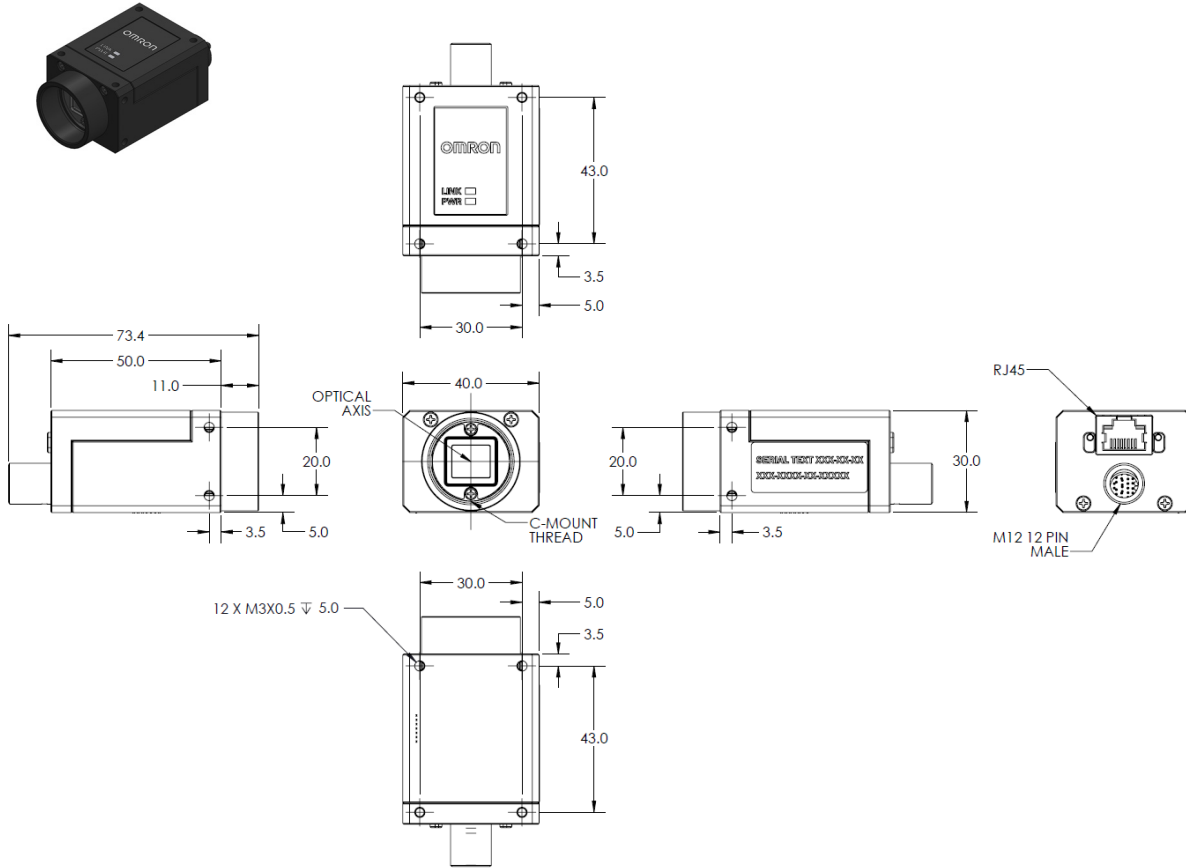




1/4-20 Reader Mounting Block Kit V440-AM0

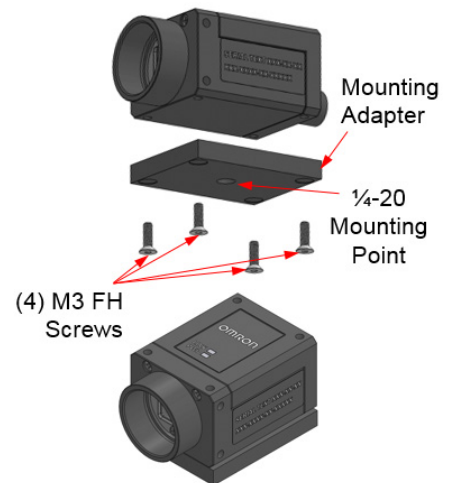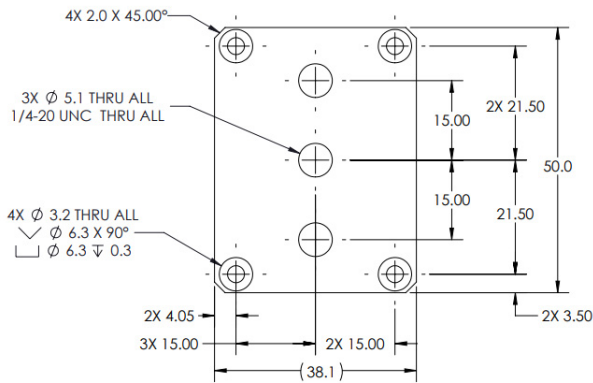

Smart Series R-70 Ring Light to V440-F Mounting Bracket Kit
V440-AM1

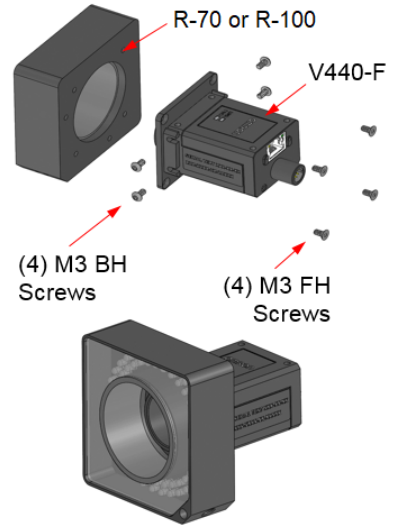
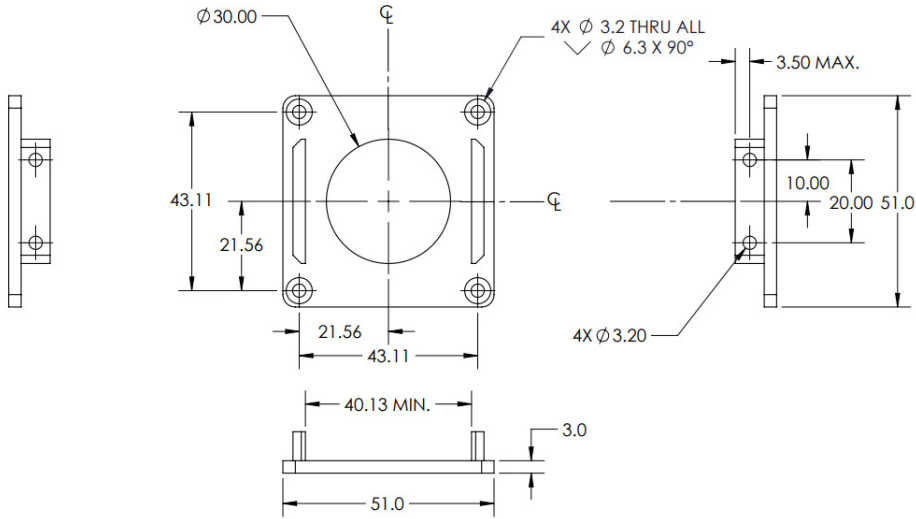
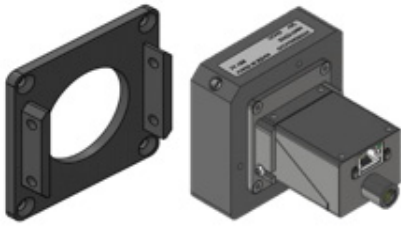


Smart Series R-100 Ring Light to V440-F Mounting Bracket Kit
V440-AM2

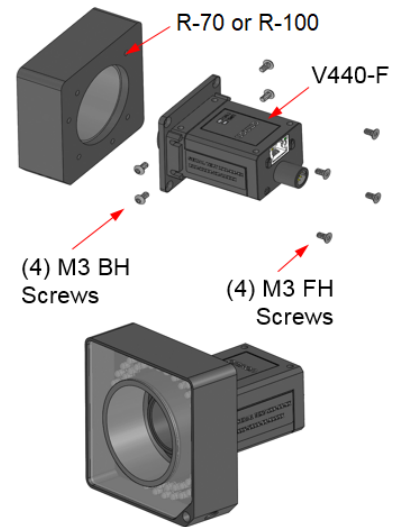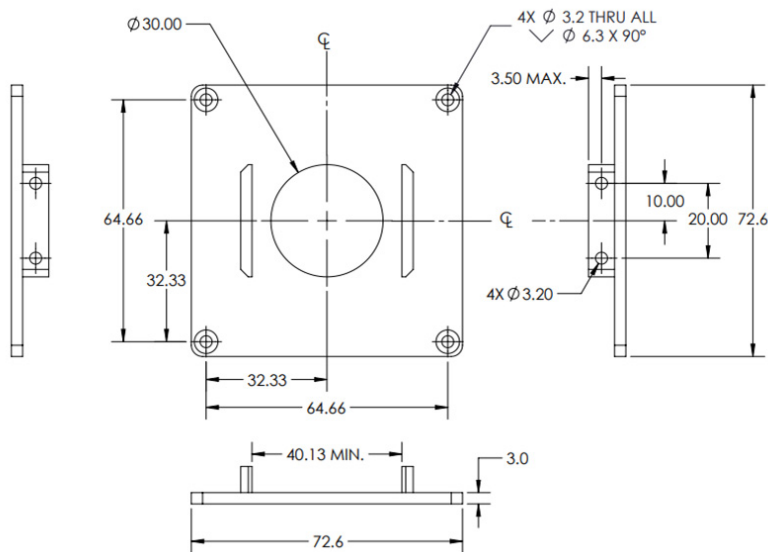
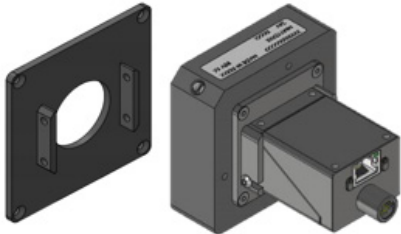


V440-F


Smart Series R-70 Ring Light Polarizer Kit 98-9000301-01

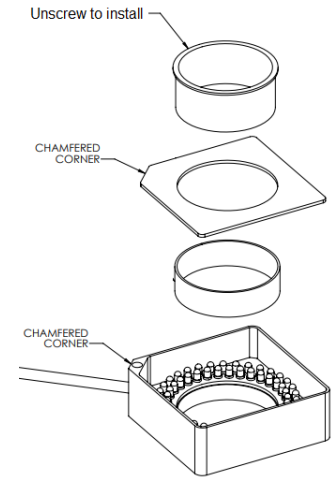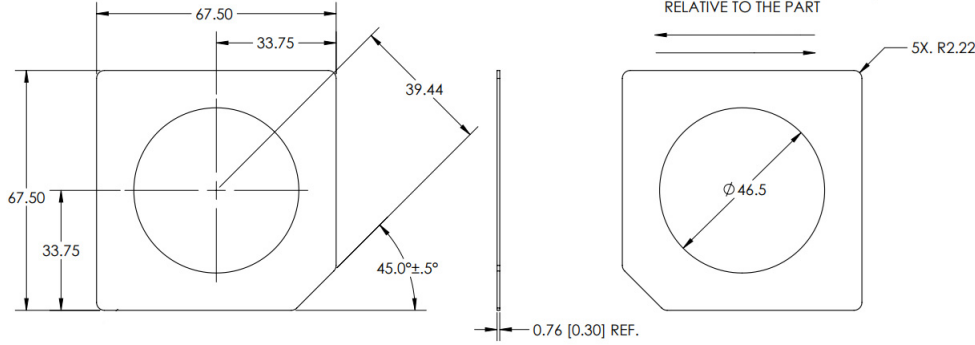


Smart Series R-100 Ring Light Polarizer Kit 98-9000302-01

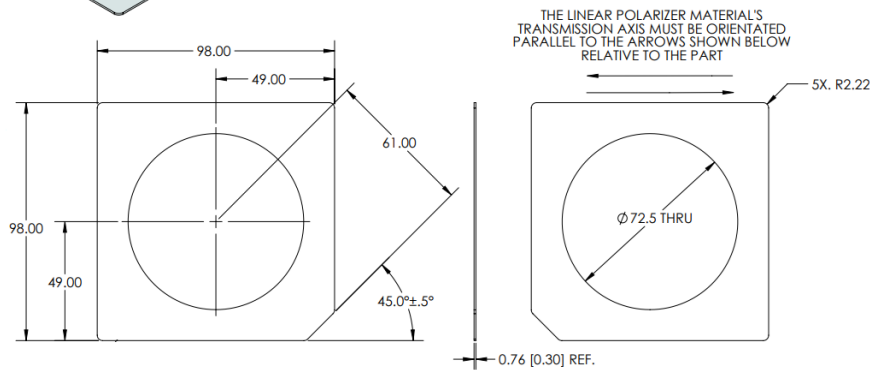


QX-1 Photo Sensor, M12 4-Pin Plug, NPN – 2 Meters – Light ON / Dark ON 99-9000016-01

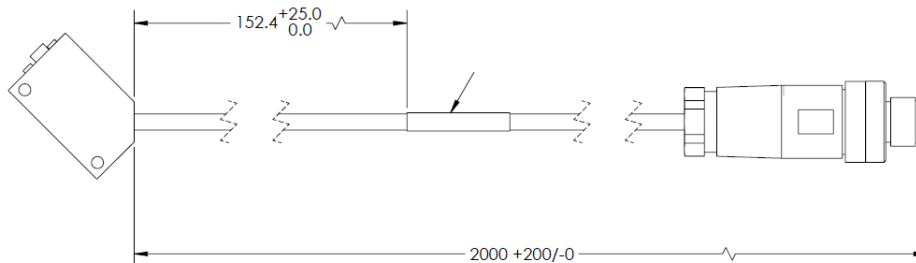


QX-1 Interconnect Module – Power, Trigger, Smart Light Control Breakout
98-000103-02

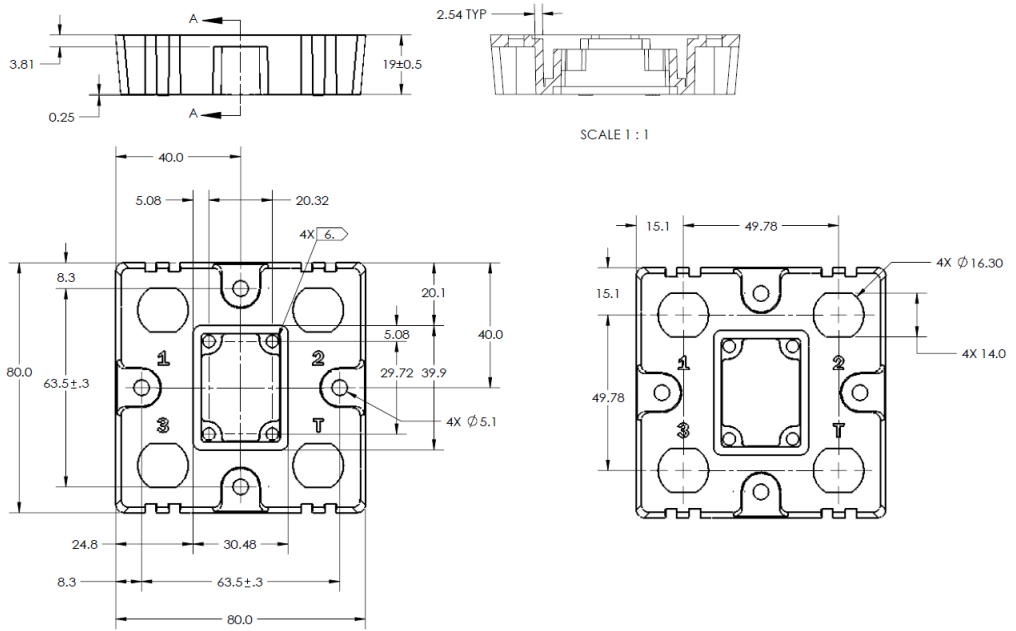










QX-1 Field-Wireable M12 4-Pin Plug for Any Trigger Source or Photo Sensor – Screw Terminals
98-9000239-01

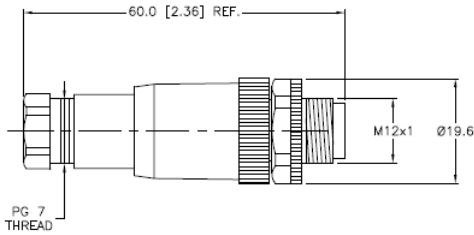

Power Supply, 100-240VAC, +24VDC, M12 12-Pin Socket – 1 Meter – U.S. / Euro Plug
97-000012-01

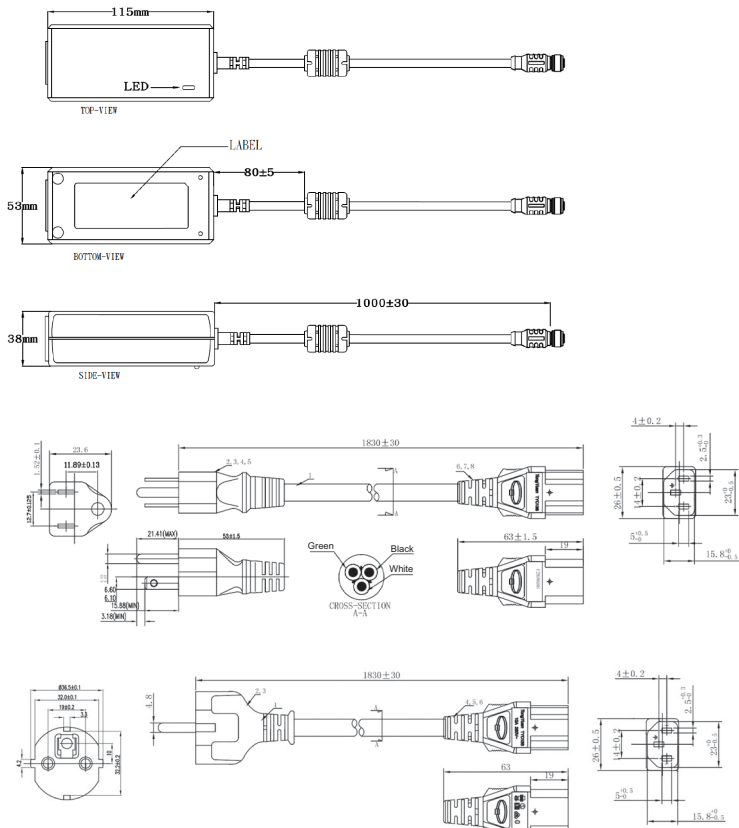


Reader to QX-1 Interconnect Cables – 1 Meter, 3 Meters, or 5 Meters
M12 Socket to M12 Plug
QX-1 is used as breakout module for common IO signals and power.
V430-WQ-1M
V430-WQ-3M
V430-WQ-5M

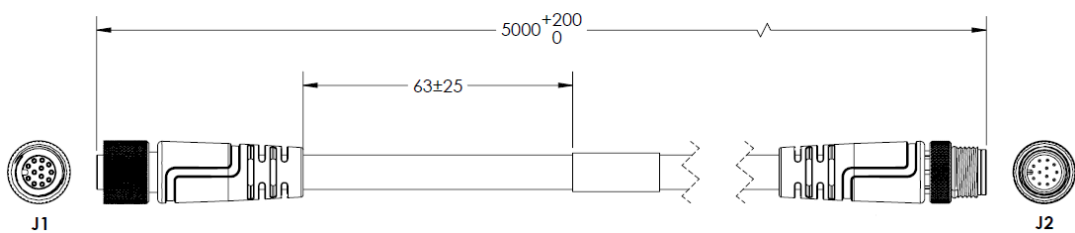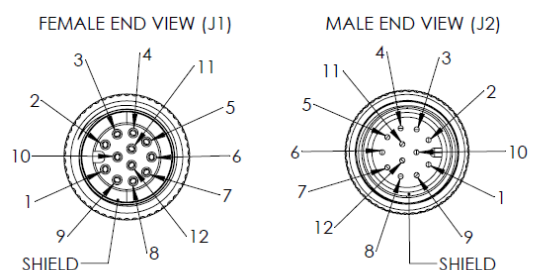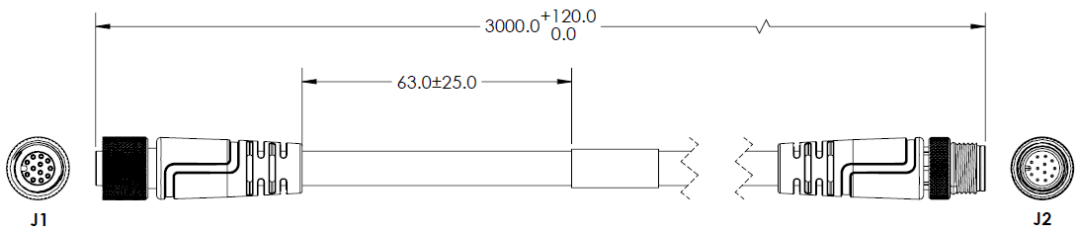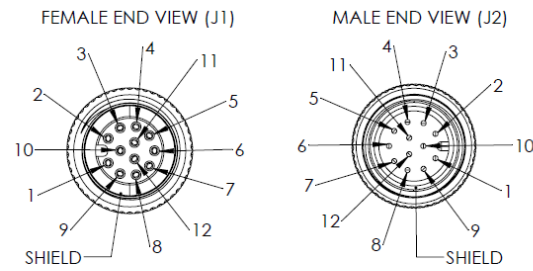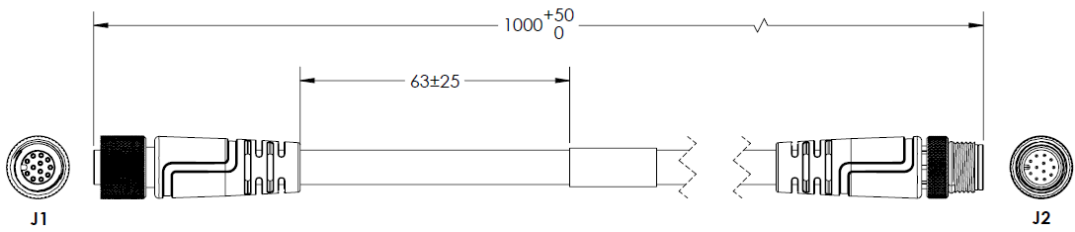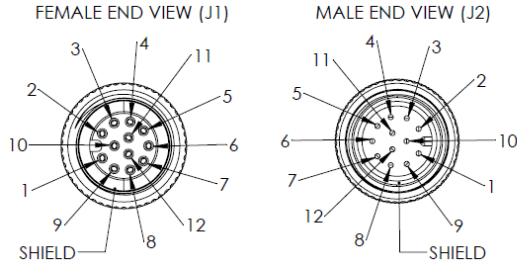


V440-F

M12 Socket to M12 Plug, with Power Filter – 300 mm V430-WQF-1M



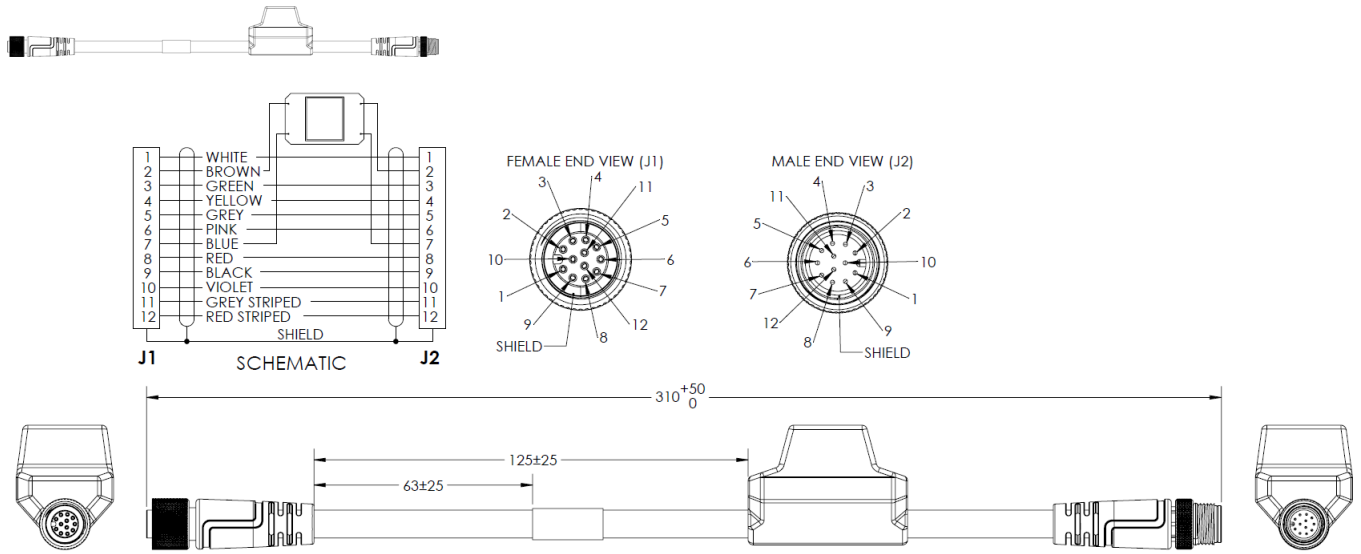


QX-1 M12 to Smart Light Power and Strobe Control Cables – 3 Meters M12 Plug on QX-1 to 5 Pin Socket on Light 61-000204-01 (Continuous Power) 61-000218-01 (Strobe Control)

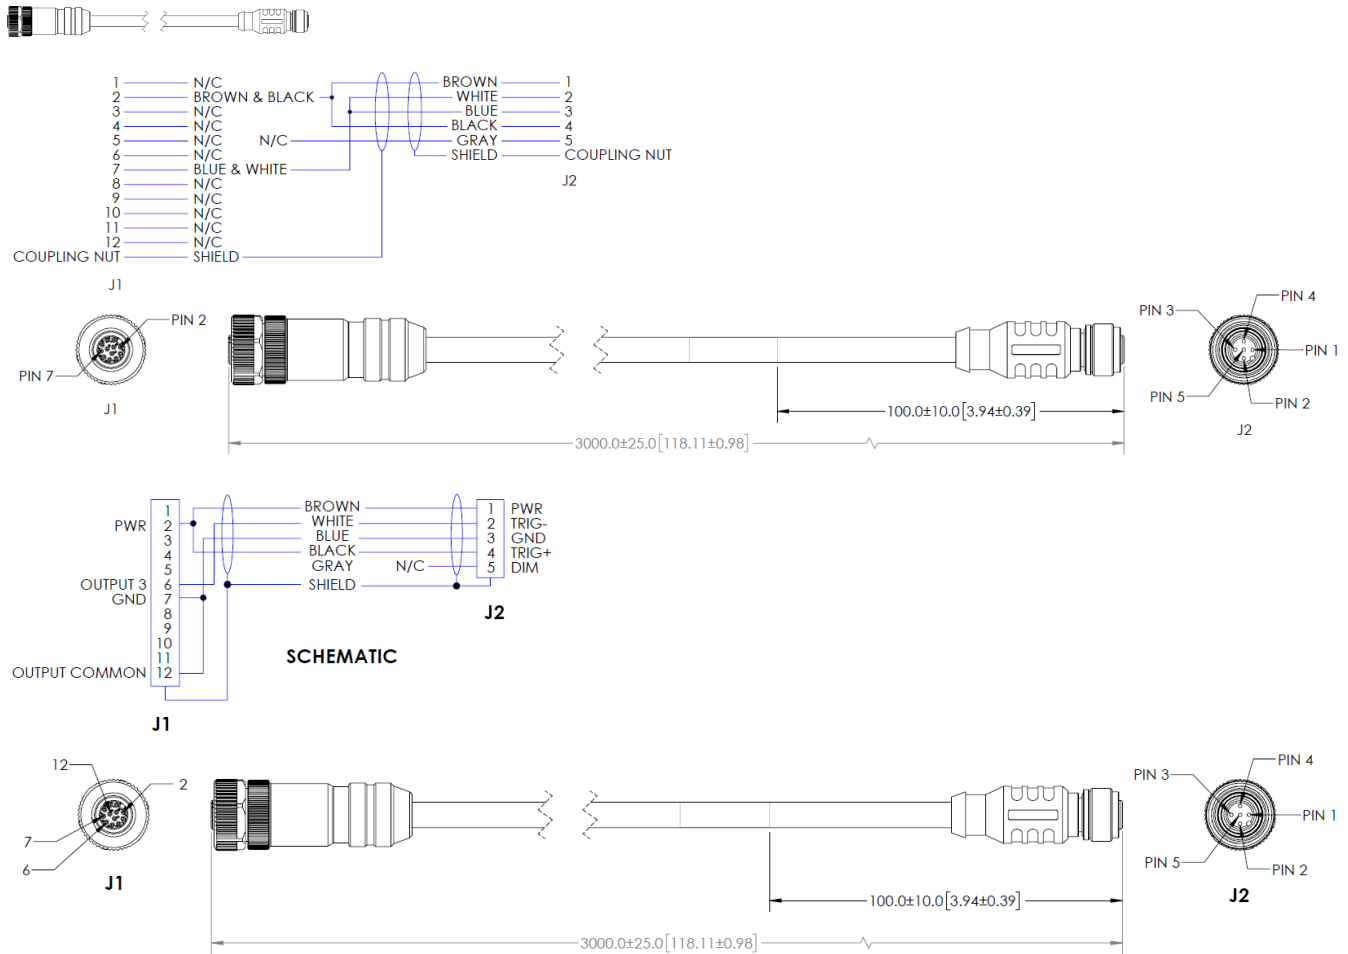


Y Cable, Reader/Power and Smart Light Power (Continuous On) – 1 Meter
61-9000135-01

Y Cable, Reader/Power and Smart Light Strobe Control – 1 Meter
61-9000137-01

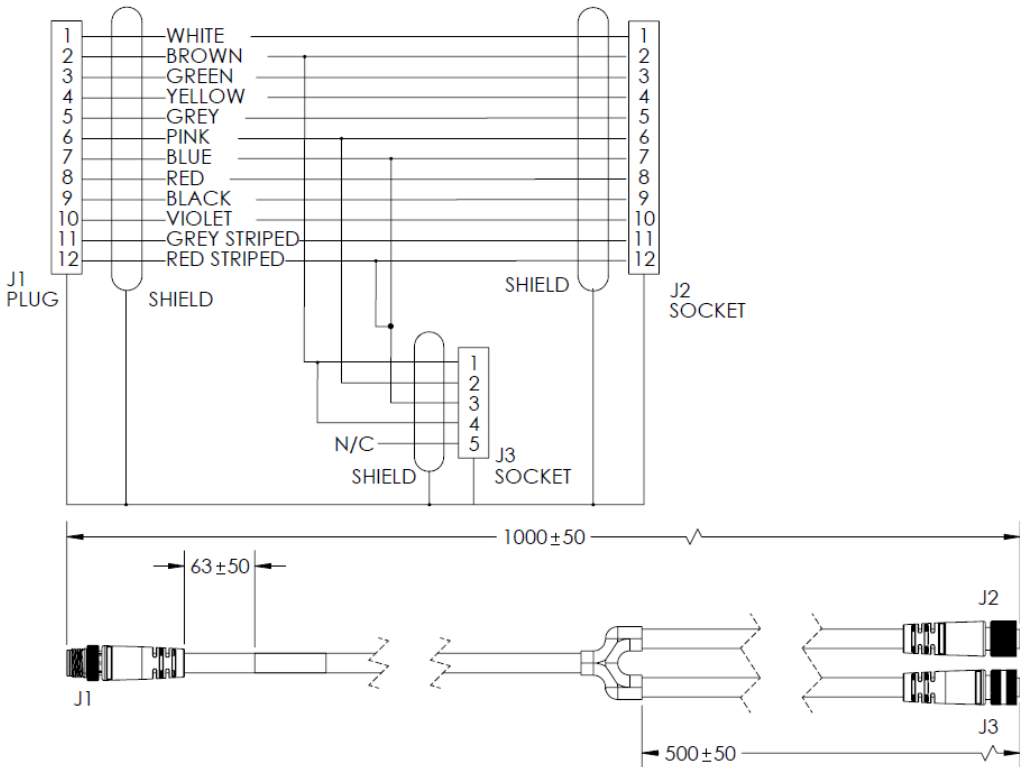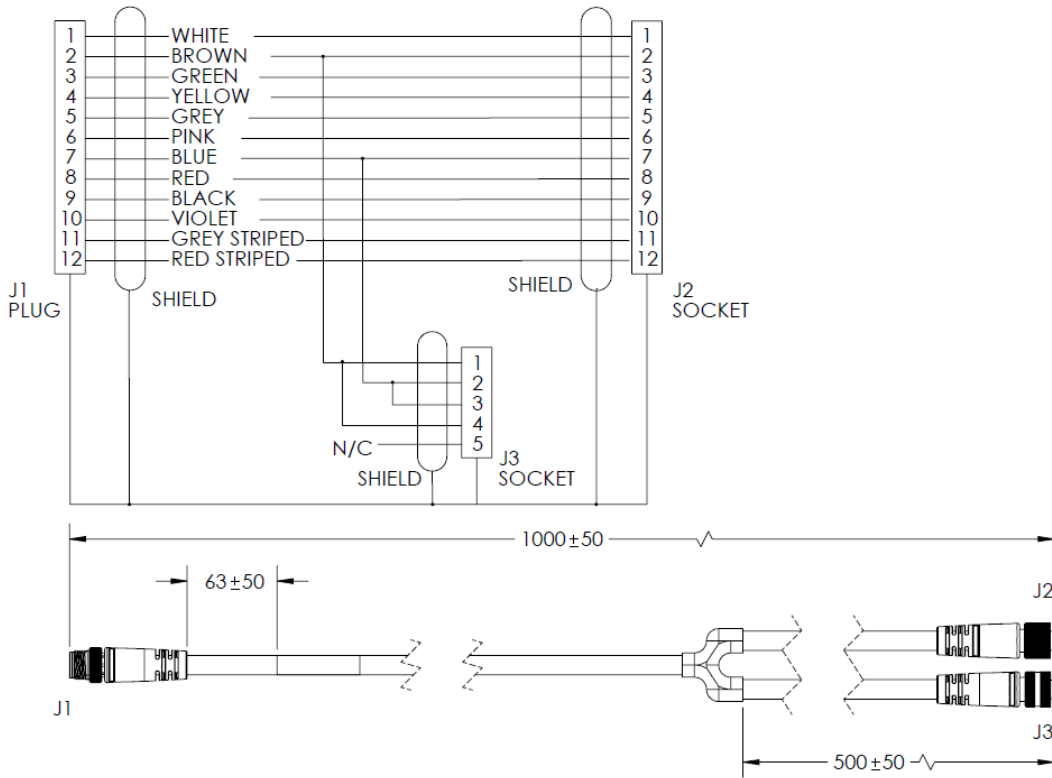


V440-F



M12 to Flying Leads Cable, Straight Power, IO, RS-232, USB – 3 Meters or 5 Meters
 V430-W8-3M
 V430-W8-5M




| Pin | Function |
|-----|-------------------|
| 1 | Trigger |
| 2 | Power (+VIN) |
| 3 | Default |
| 4 | New Master |
| 5 | Output 1 |
| 6 | Output 3 |
| 7 | Ground (-VIN) |
| 8 | Input Common |
| 9 | RS-232 (Host) RxD |
| 10 | RS-232 (Host) TxD |
| 11 | Output 2 |
| 12 | Output Common |

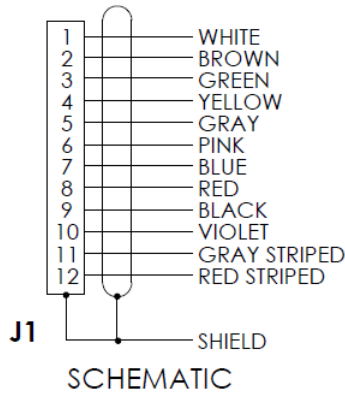



FEMALE END VIEW (J1)

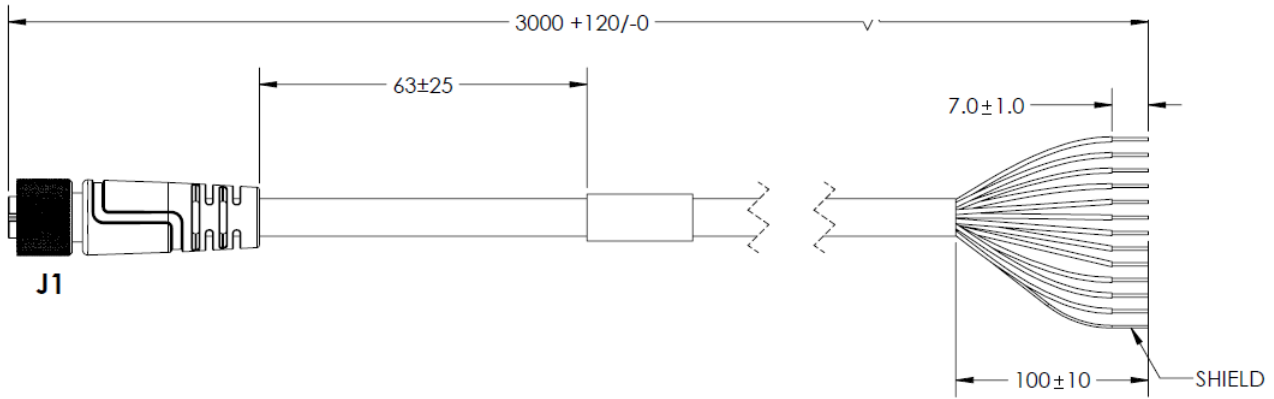


| Pin | Function |
|-----|-------------------|
| 1 | Trigger |
| 2 | Power (+VIN) |
| 3 | Default |
| 4 | New Master |
| 5 | Output 1 |
| 6 | Output 3 |
| 7 | Ground (-VIN) |
| 8 | Input Common |
| 9 | RS-232 (Host) RxD |
| 10 | RS-232 (Host) TxD |
| 11 | Output 2 |
| 12 | Output Common |

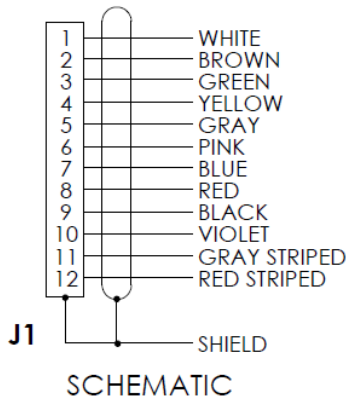


FEMALE END VIEW (J1)

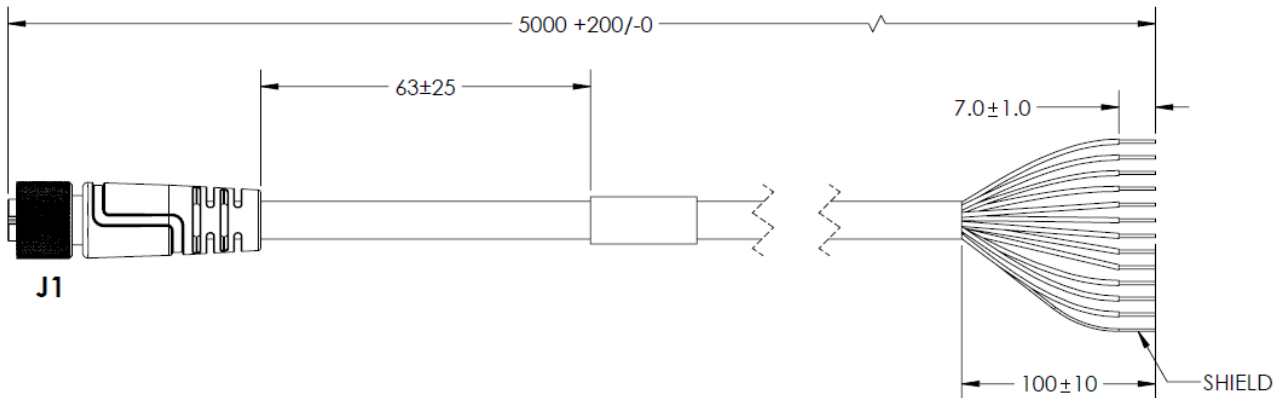


M12 to Flying Leads Cable, with Power Filter – 3 Meters or 5 Meters
V430-W8F-3M
V430-W8F-5M




| Pin | Function |
|-----|-------------------|
| 1 | Trigger |
| 2 | Power (+VIN) |
| 3 | Default |
| 4 | New Master |
| 5 | Output 1 |
| 6 | Output 3 |
| 7 | Ground (-VIN) |
| 8 | Input Common |
| 9 | RS-232 (Host) RxD |
| 10 | RS-232 (Host) TxD |
| 11 | Output 2 |
| 12 | Output Common |

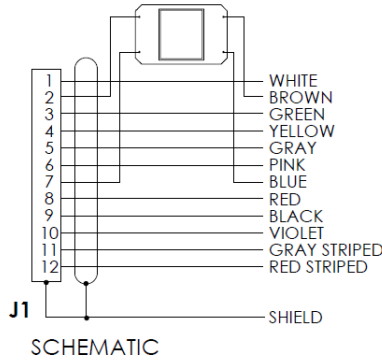


FEMALE END VIEW (J1)




SCHEMATIC

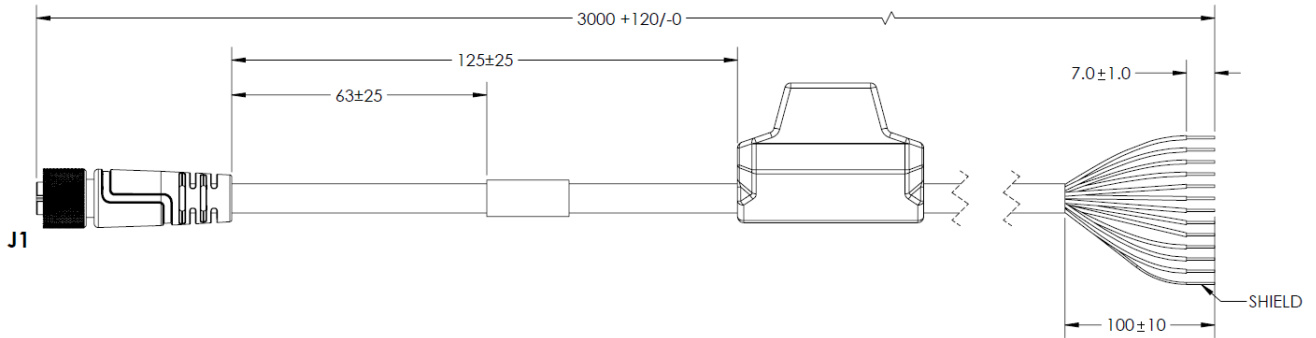


| Pin | Function |
|-----|-------------------|
| 1 | Trigger |
| 2 | Power (+VIN) |
| 3 | Default |
| 4 | New Master |
| 5 | Output 1 |
| 6 | Output 3 |
| 7 | Ground (-VIN) |
| 8 | Input Common |
| 9 | RS-232 (Host) RxD |
| 10 | RS-232 (Host) TxD |
| 11 | Output 2 |
| 12 | Output Common |

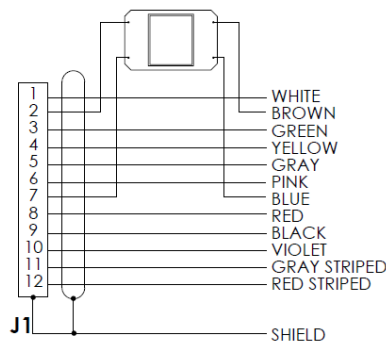

FEMALE END VIEW (J1)




SCHEMATIC

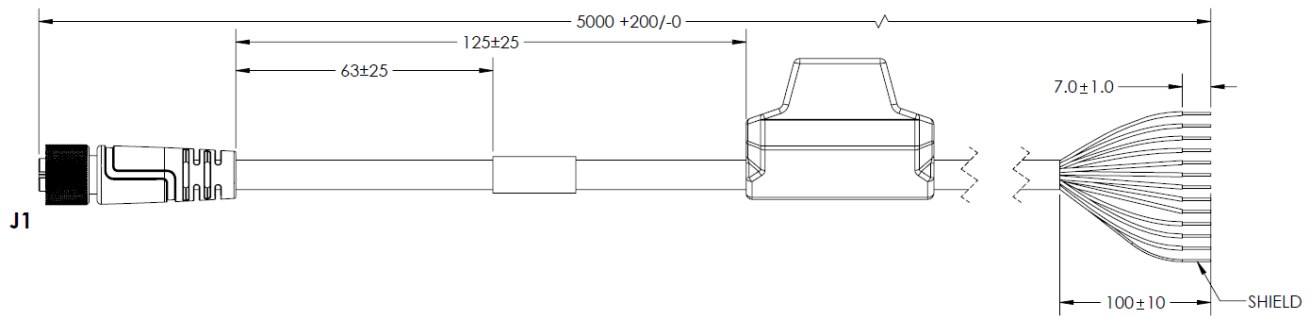


V440-F




M12 to RS-232 Breakout – 1 Meter or 3 Meters V430-WR-1M V430-WR-3M

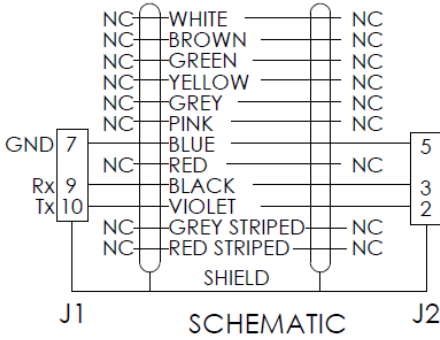


M12 END VIEW (J1)





DB9 END VIEW (J2)

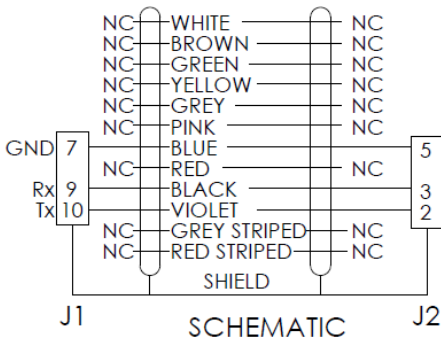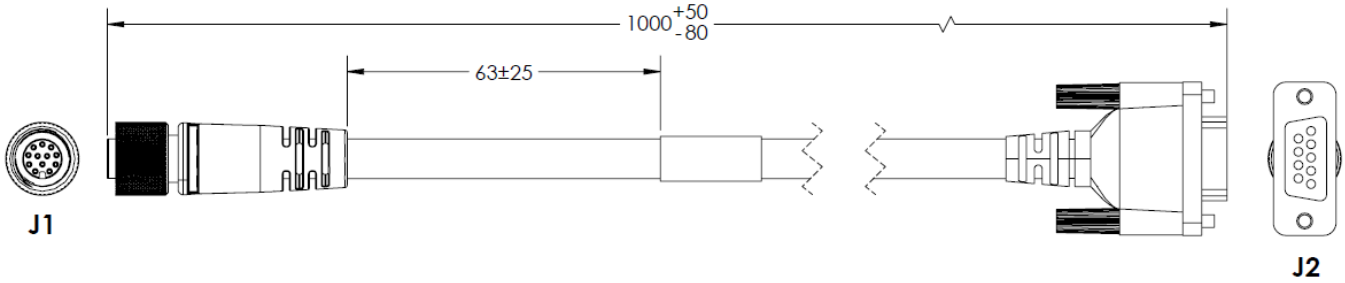




M12 END VIEW (J1)






DB9 END VIEW (J2)

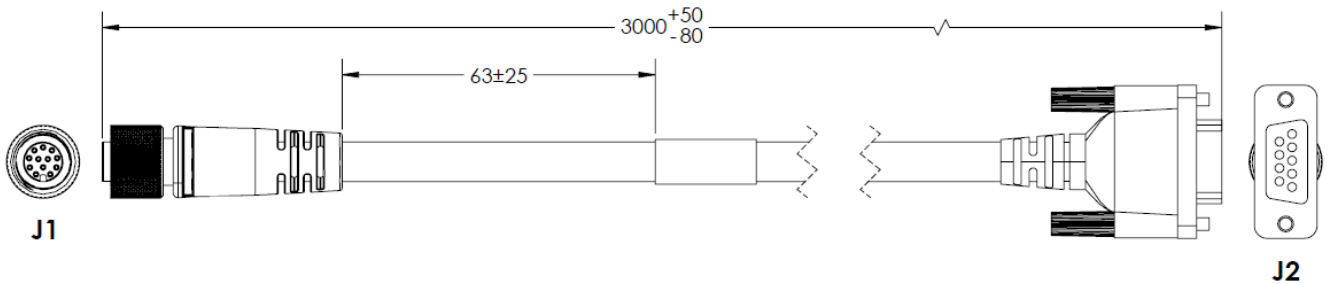

**Reader to QX-1 Interconnect Cables with RS-232 Breakout – 2.7 Meters
V430-WQR-3M**

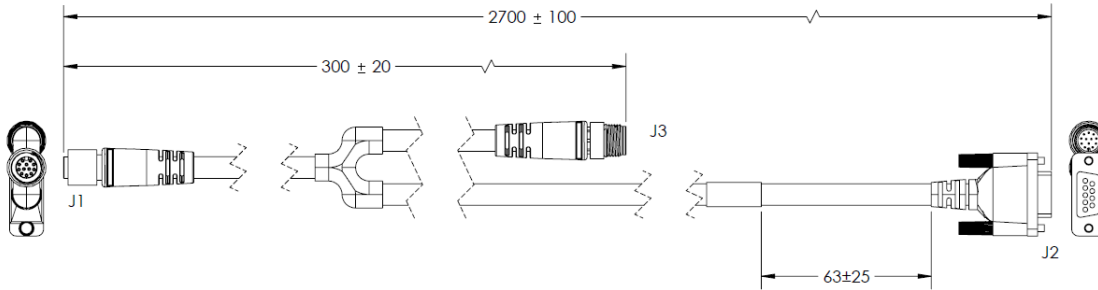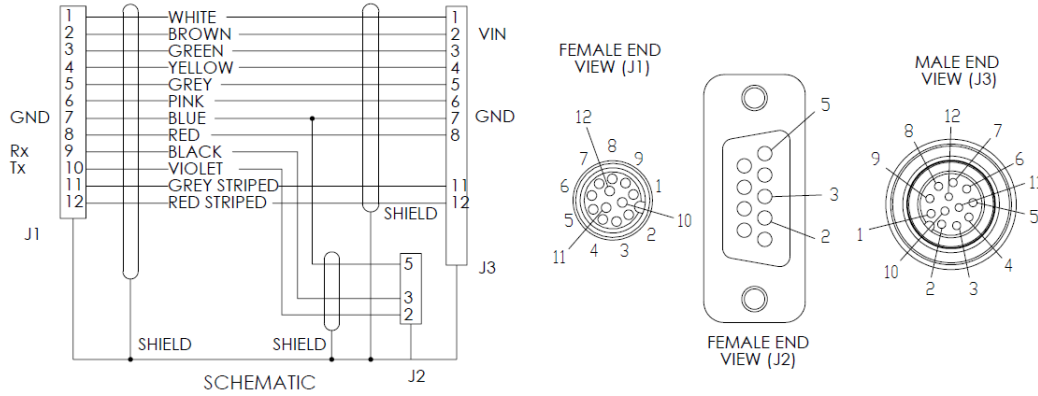

**Reader to QX-1 Interconnect Cables with USB Keyboard Wedge Breakout – 2.7 Meters
V430-WQK-3M**

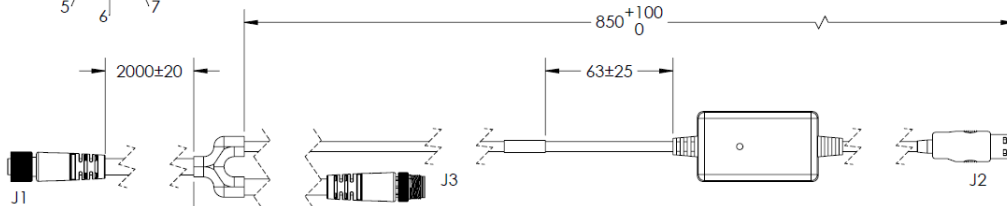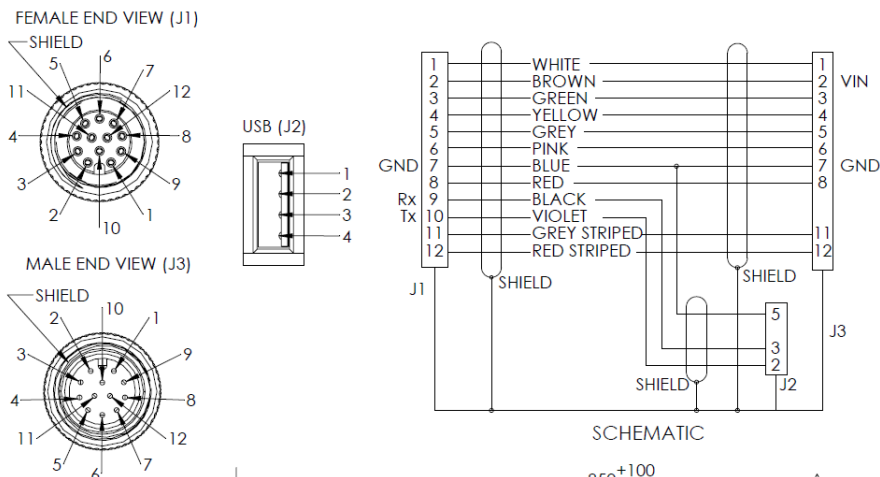


V440-F


Smart Series Light Cable 5 Pin M12 Female to Flying Leads, 3 Meters and 5 Meters

61-000186-01


61-000187-01

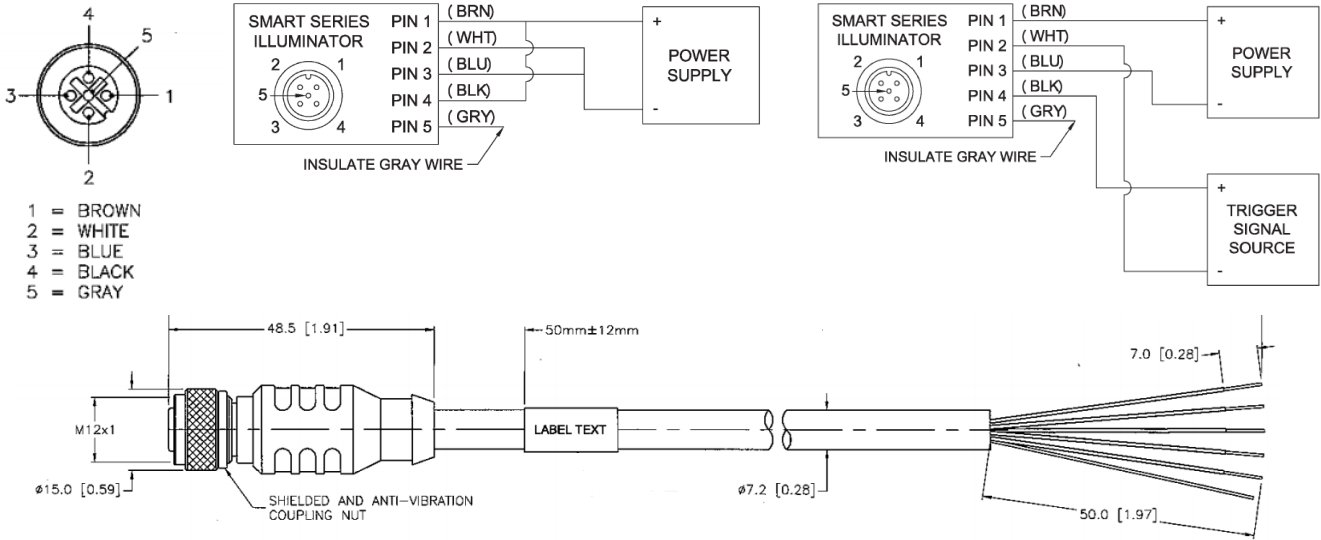


DSP60 24VDC 2.5A DIN Mount Power Supply NER-011504100

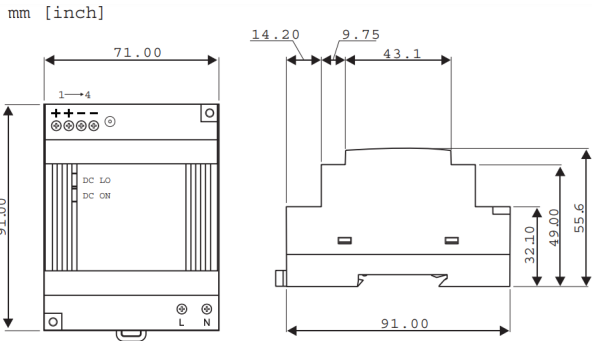

Kit, Spot Light, Blue, Telecentric Lens with Flying Leads Extension Cable 98-9000304-01

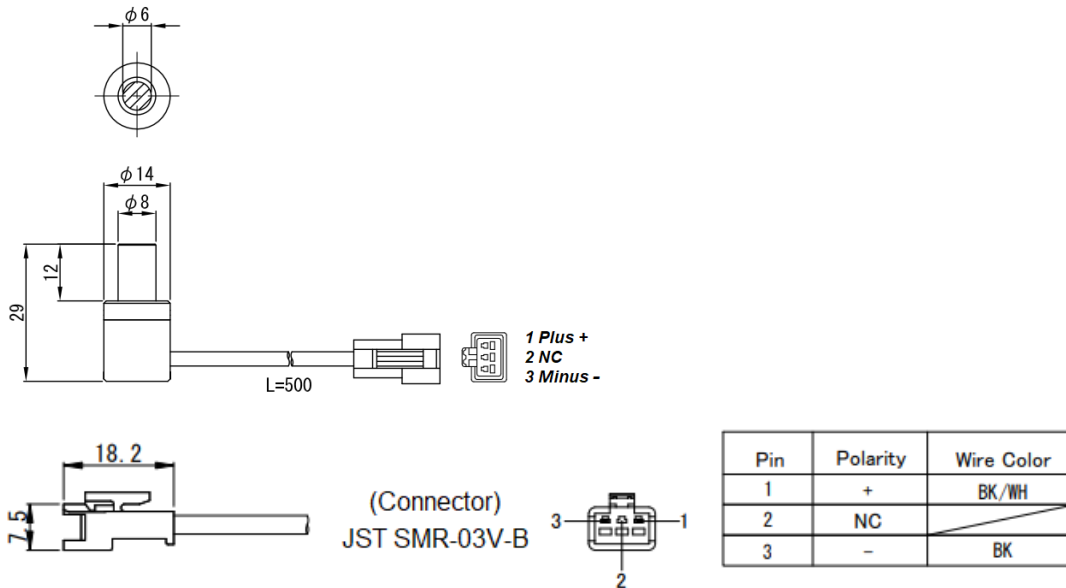

Spot Light Extension Cable, Flying Leads, 5M

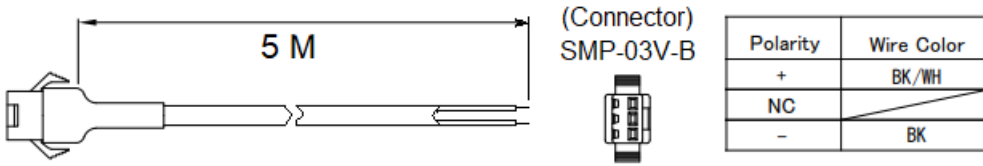

Industrial High-Flex Ethernet Cables with Jack Screws and RJ45, 2 Meters, 5 Meters, and 7 Meters

- 98-000133-01
- 98-000134-01
- 98-000134-02



Industrial High-Flex Ethernet Cables

Industrial High-Flex cables provide an interface between V440-F readers and other devices.

These cables are designed for harsh environments that could damage a traditional CAT 5 cable. The overmold design provides increased strain relief. Thumbscrew locking keeps the connection secure despite shock and vibration. The double-shielded design provides extra protection in industrial applications.

High-Flex cables are designed to withstand 12 million+ flex cycles. The TPE jacket provides additional protection from elements such as oil, water, and abrasion.

| Cable Specifications | |
|----------------------|--------------|
| Overall Diameter | .245 Inches |
| Max. Temperature | 80 Degrees C |
| Jacket Color | Black |
| UL/CSA Rated | Yes |
| Min. Bend Radius | 2.45 Inches |
| Flame Rating | FT-1 |

| Primary Components | |
|--------------------|-----------------|
| Cable | 4 Twisted Pairs |
| Connector A | Standard RJ45 |
| Connector B | Standard RJ45 |

V440-F

Related Manuals

| Model | Part Number | Manual |
|------------|---------------|--|
| V440-F | 84-9000440-02 | V440-F C-Mount Code Reader User Manual |
| | 84-9350045-02 | V440-F C-Mount Code Reader Communication Manual |
| | 84-9200005-03 | WebLink 3.0 Help (Accessible from the Help menu in the WebLink user interface) |
| FLV3Z4S-LE | O198 | Vision Accessory Catalog |

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability: Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN

Contact : www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.

438B Alexandra Road, #08-01/02 Alexandra
Technopark, Singapore 119968
Tel: (65) 6835-3011 Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222 Fax: (86) 21-5037-2200

Authorized Distributor:

©OMRON Corporation 2023 All Rights Reserved.
In the interest of product improvement, specifications
are subject to change without notice.

Cat. No. Q342-E-03 (SP124A-EN-0523)

Printed in Japan
0523 (0621)